

Velocity Web Services Client 3.6.2.10

Installation Guide and Release Notes

Copyright© 2014-2015, Identiv. Last updated July 24, 2015.

Overview

This document provides information about version 3.6.2.10 of the Velocity Web Services Client, which is an optional browser-based client for Velocity 3.6. A major advantage of the Velocity Web Services Client (compared to the previous Velocity Web Console) is that it uses the same Velocity database.

Note that this is a limited-functionality client; only the traditional Windows-based Velocity Client provides access to all of Velocity's extensive functionality. See the [Quick Tour](#) section of this document for a brief summary of the functionality provided by the Velocity Web Services Client.

Before you can install and use the Velocity Web Services Client, you must first install Microsoft's Internet Information Services (IIS) on the same computer where the Velocity Server is installed. If your organization isn't comfortable providing remote access to your physical access control system, do not install IIS or the Velocity Web Services Client.

In this document, there is information about:

- [System Requirements](#)
- [Installing](#) the Velocity Web Services Client (and its prerequisites)
- a [Quick Tour](#) of the Velocity Web Services Client
- the [New Features and Enhancements](#), [Bug Fixes](#), and [Known Issues](#) in this release

System Requirements

The Velocity Web Services Client requires the following components:

- A physical access control system with various hardware components controlled by version 3.6 of the Hirsch Velocity security management system software
- The optional Velocity Web Services Client component for your Velocity Server, which can be installed either as part of a full Velocity 3.6 installation, or installed separately later
- A Web server running Microsoft's Internet Information Services (IIS) (version 6.0 or later), which is installed on the same computer where the Velocity Server is installed
- A personal computer, tablet computer, or smartphone running a relatively current Web browser such as Google's Chrome (version 39.0 or later), Microsoft's Internet Explorer (version 11 or later), or Apple's Safari (version 6.2 or later). We recommend using Google's Chrome browser.
- To use the new multiple access zones feature, CCM firmware version 7.5.28 (or later) must be installed on each controller where you want to enable multiple access zones. For details, see [VELWC-242](#).

Installing the Velocity Web Services Client (and its prerequisites)

The optional Velocity Web Services Client can be installed either as part of a full Velocity 3.6 installation, or separately after the Velocity installation. After installing this client, you must also perform a few configuration and setup tasks.



Prerequisites: To install the Velocity Web Services Client, you must be logged into Windows using an account that has Administrator privileges, and you must know the name and password of the Velocity services account (which were specified when Velocity was installed).

NOTES: The Velocity Web Services Client only needs to be installed on your Velocity Server. If you want to install and use this optional client, you must first install Microsoft's Internet Information Services (IIS) on the same computer where the Velocity Server is installed. The installer program checks your existing system to see whether all of the prerequisites for this new client have been met.

Installing Microsoft's Internet Information Services (IIS) to Support the Velocity Web Services Client


Before you can install and use the Velocity Web Services Client, you must first install Microsoft's Internet Information Services (IIS) on either your Windows 7 standalone Velocity workstation or your Windows Server 2008 Velocity server or workstation.

NOTE: Velocity 3.6 supports newer versions of Microsoft's Windows operating system (including Windows 8.1, Windows Server 2012, and Windows Server 2012 R2. Installing IIS on Windows 8.1 should be similar to installing it on Windows 7, and installing IIS on Windows Server 2012 or Windows Server 2012 R2 should be similar to installing it on Windows Server 2008.

To install IIS on Windows 7:

1. From your Windows 7 Start menu, launch **Control Panel**.
2. If you are viewing by Category: click the **Programs** link, and then click the '**Turn Windows Features on or off**' link (in the Programs and Features category).

If you are viewing by Small Icons or Large Icons: click **Programs and Features**, and then click the '**Turn Windows Features on or off**' link (in the left pane).
3. In the resulting Windows Features dialog, expand the **Internet Information Services** folder to reveal the available options.
4. Check the options that are highlighted in the boxes below, and then click **OK**.

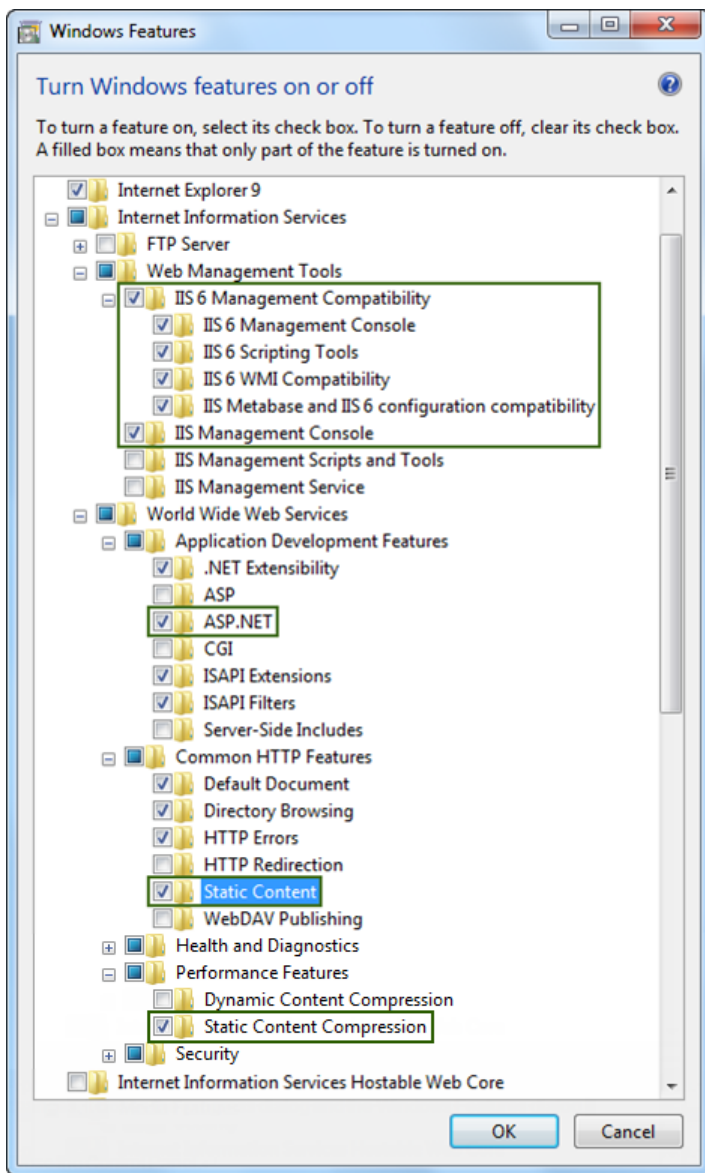


A progress dialog informs you that Windows is making the requested feature changes. When Windows has finished making the changes, it closes the progress dialog and the Windows Features dialog.


5. Close the Control Panel.

To install IIS on Windows Server 2008:

1. From your Windows Server 2008 Start menu, launch **Control Panel**.
2. If you are viewing by Category: click the '**Turn Windows Features on or off**' link (at the bottom of the left column).
If you are viewing by Small Icons or Large Icons: click **Programs and Features**, and then click the '**Turn Windows Features on or off**' link (in the left pane).
3. In the resulting Server Manager window, click the **Features** item (in the left pane), and then click the **Add Features** link.
4. In the resulting Add Features Wizard, scroll down and check the '**SMTP Server**' box.
5. In the resulting dialog that asks 'Add role services and features required for SMTP Server?', click the **Add Required Role Services** button.

6. In the Add Features Wizard, click **Next**.
7. On the Web Server (IIS) page of the Add Features Wizard, click **Next**.
8. If necessary, on the Select Role Services page of the Add Features Wizard, expand the **Web Server** folder and the **Management Tools** folder to display the available options.
9. Under Web Server, select these options:
 - the Common HTTP Features option of **Static Content**
 - the Application Development option of **ASP.NET**. (If you receive a dialog that asks 'Add role services required for ASP.NET?', click the Add Required Role Services button.)
 - the Performance option of **Static Content Compression**
10. Scroll down, and under Management Tools, select:
 - **IIS Management Console**
 - **IIS 6 Metabase Compatibility**
 - **IIS 6 WMI Compatibility**
 - **IIS 6 Scripting Tools**
 - **IIS 6 Management Console**
11. Verify that you have selected all the options highlighted in the boxes below, then click **Next**.

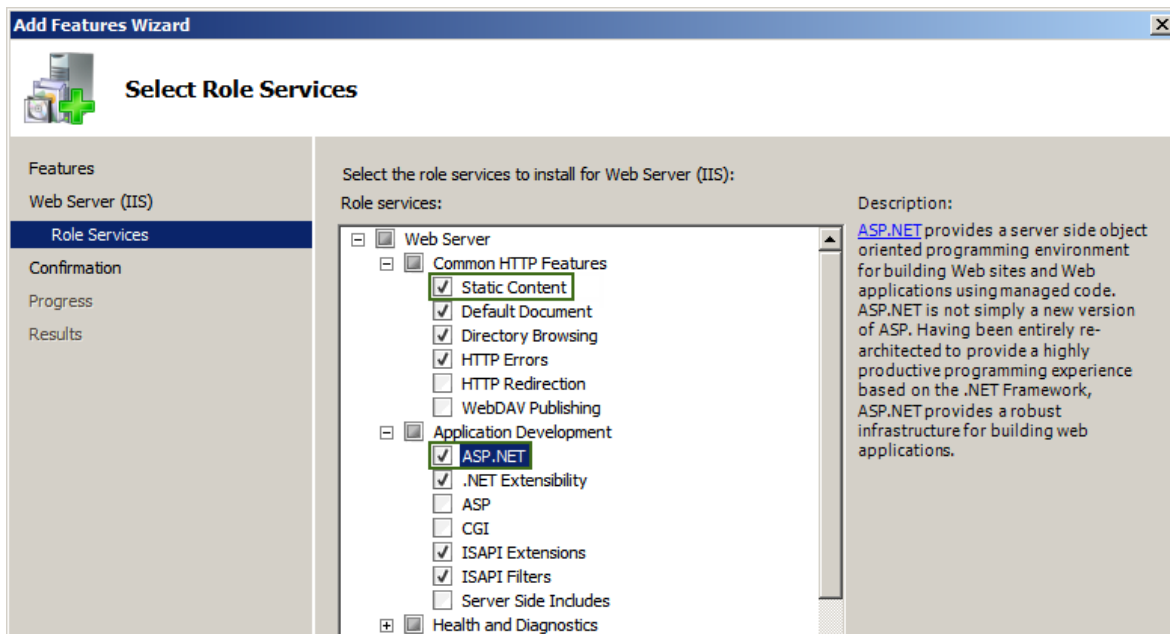

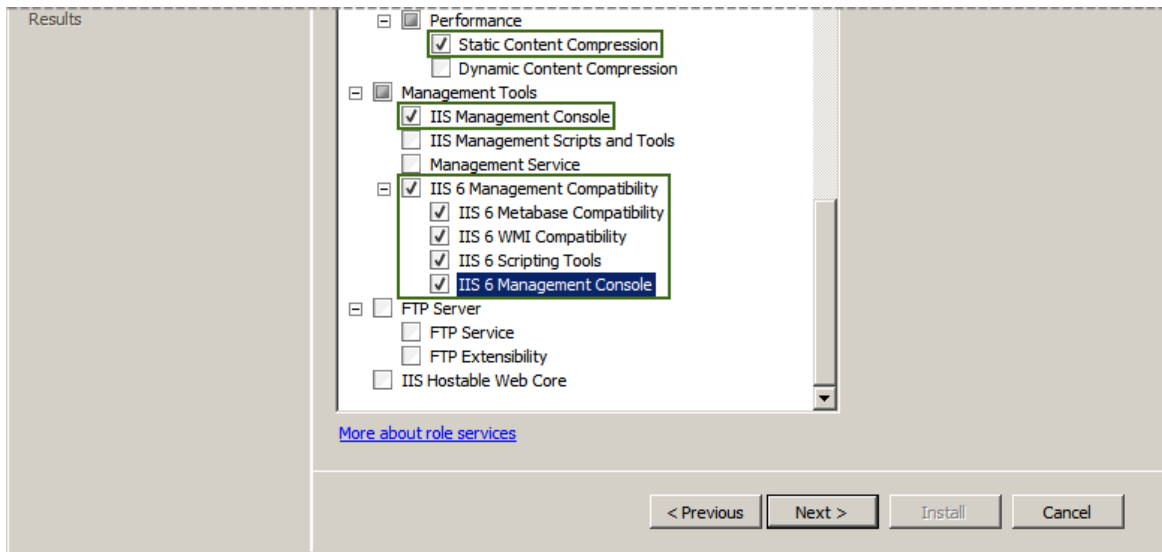

12. On the Confirm Installation Selections page of the Add Features Wizard, click **Install**.


On the Installation Progress page of the Add Features Wizard, progress messages are displayed until the installation is complete.

13. On the Installation Results page of the Add Features Wizard, verify that the installation succeeded, and click **Close**.

14. In the Server Manager window, verify that the **Web Server (IIS)** role was installed. You can then close the Server Manager window and the Control Panel.

Installing the Velocity Web Services Client during the Velocity Installation


1. Start following the instructions in the **Installation ► Starting the Velocity Installation** topic of the Velocity 3.6 Installer's help system.
2. At the **Install Options** screen, select either the **Server** role or the **Workstation** role for your computer.
3. At the resulting **Web Services Options** screen, select the **Install Velocity Web Services** option (to install the Web Services that support the Velocity Web Services Client), then click **Next**.

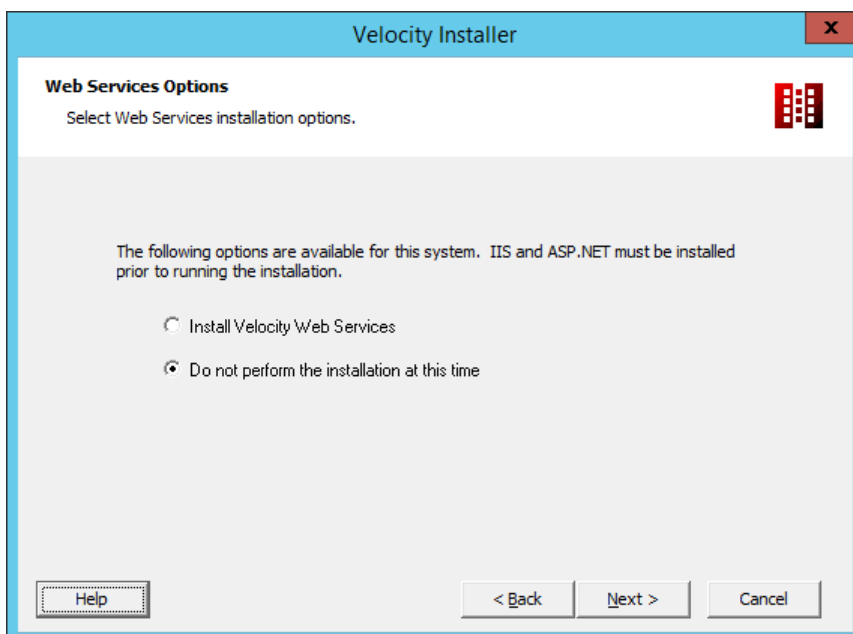


4. If you selected the **Server** role, then perform the steps in the **Installation ► Server Installation** help topic.

If you selected the **Workstation** role, then perform the steps in the **Installation ► Workstation Installation** help topic.

5. Eventually, the first page of the **Velocity Web Services Client Installer** wizard is displayed. On this **Application Install Option** page, select one of the options, then click **Next**.

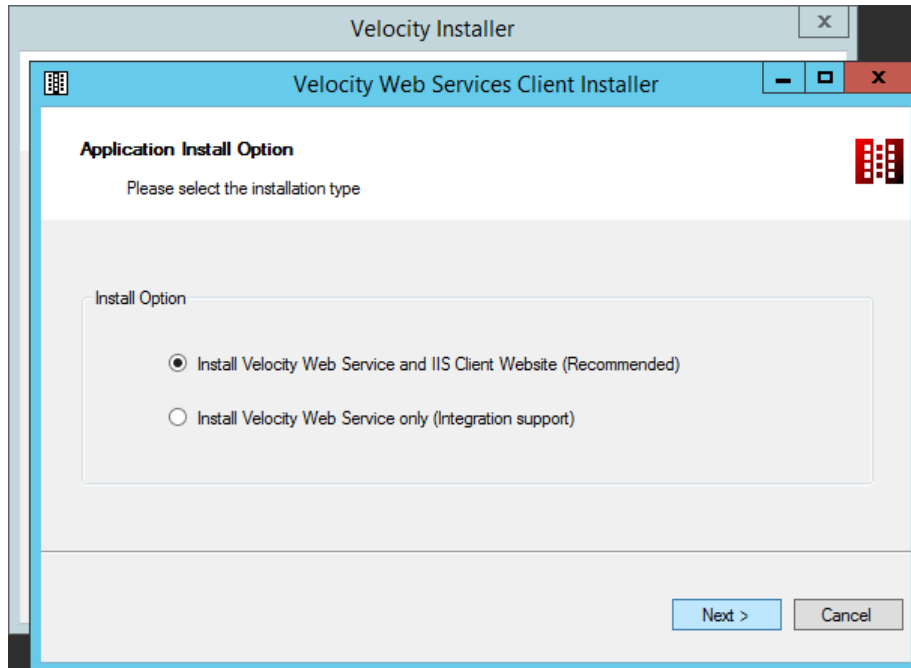


After you click the **Next** button, the following screen appears:

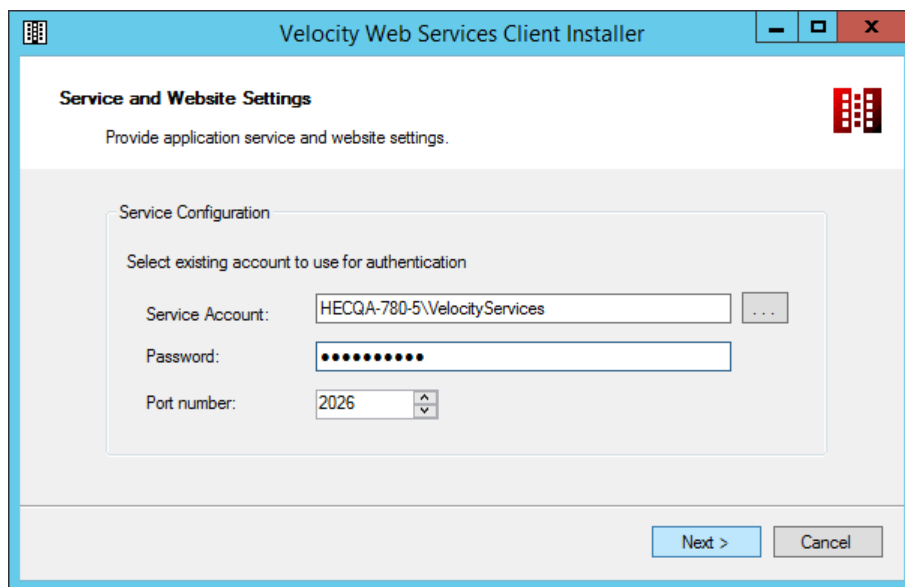


6. On this **Service and Website Settings** screen:
 - A. In the **Service Account** field, verify or change the user account (by default in the Velocity Services group) that the underlying service for the Velocity Web Services Client will use to log on to Velocity. The default information is automatically obtained for you.
 - B. In the **Password** field, enter the password that the specified Service Account will use to log on to Velocity. (Enter the same password that was used on the **Application Network and Security** page of the Velocity Installer wizard.)
 - C. In the **Port number** field, enter the network port number that will be used for communication between Velocity and the Velocity Web Services Client.

D. Click **Next**.


An **Application Installation** screen displays progress information while the Velocity Web Services Client is being installed. For example:

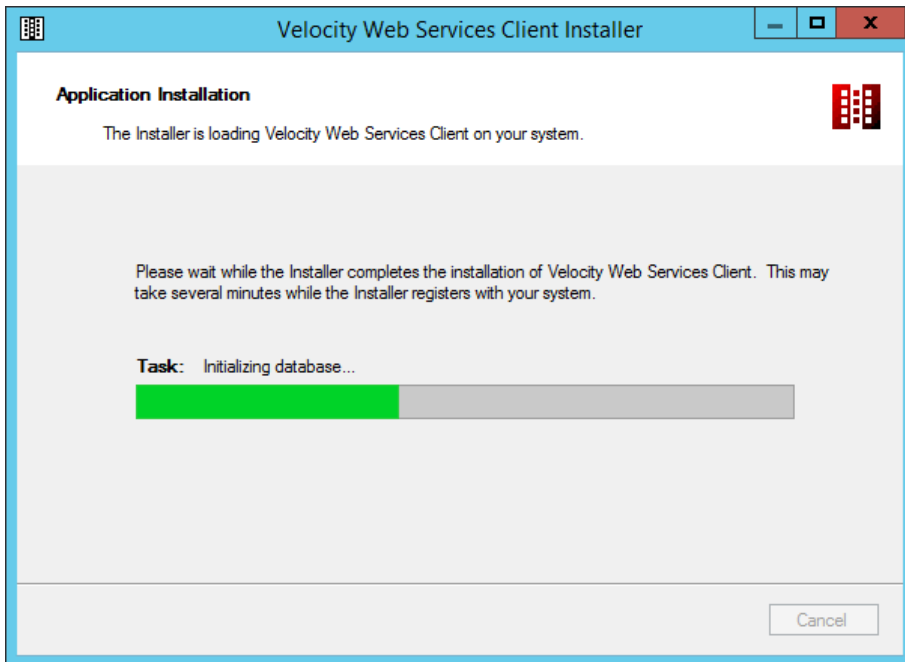


7. When the following dialog appears, choose whether or not you need the Velocity Web Service use the secured HTTPS protocol when communicating with some other software components.

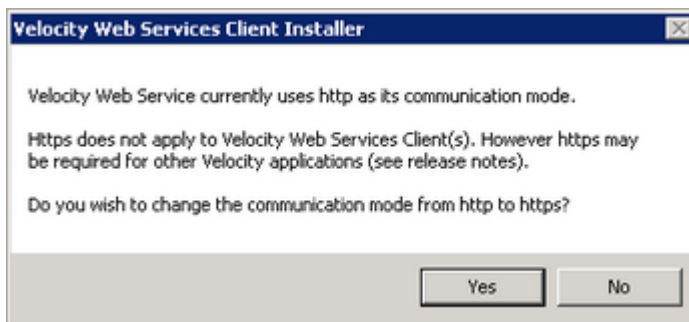

After the installation of the Velocity Web Services Client has finished, its installer wizard closes, and the primary Velocity installation begins, with progress information displayed on its **Application Installation** page. For example:

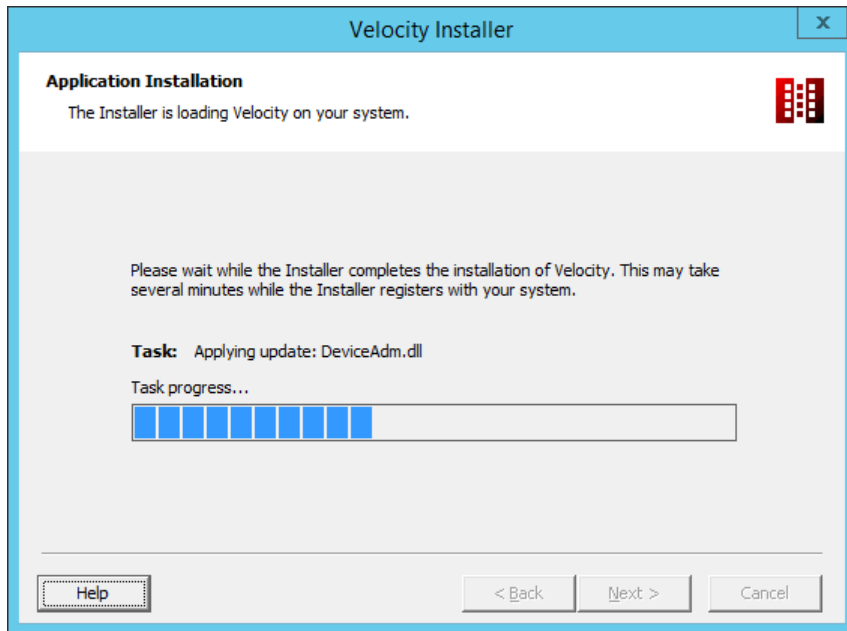

8. When the **Installation Complete** screen is displayed, select the desired Closing Options, and click the **Close** button.

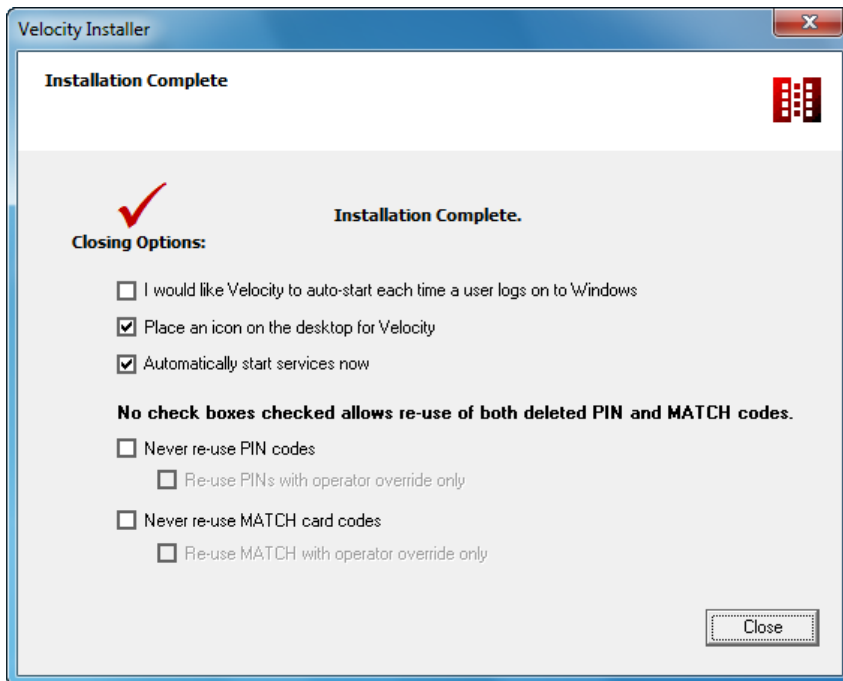

After Velocity and the Velocity Web Services Client have finished installing, ensure that:


- [the Velocity Web Service is running](#)
- if you want to use a network port other than the default of 80, you must [configure the network port used by the default IIS Web site](#) to communicate with the Velocity Web Services Client
- [the network port used by the default IIS Web site is allowed through your firewalls](#)

Installing the Velocity Web Services Client Separately (after the Velocity Installation)

To install the Velocity Web Services Client later, perform the following steps.

1. Run the **vwc2install.exe** file located in your Velocity installation folder.
2. The first page of the **Velocity Web Services Client Installer** wizard is displayed. On this **Application Install Option** page, select one of the options, then click **Next**.


After you click the **Next** button, the following screen appears:

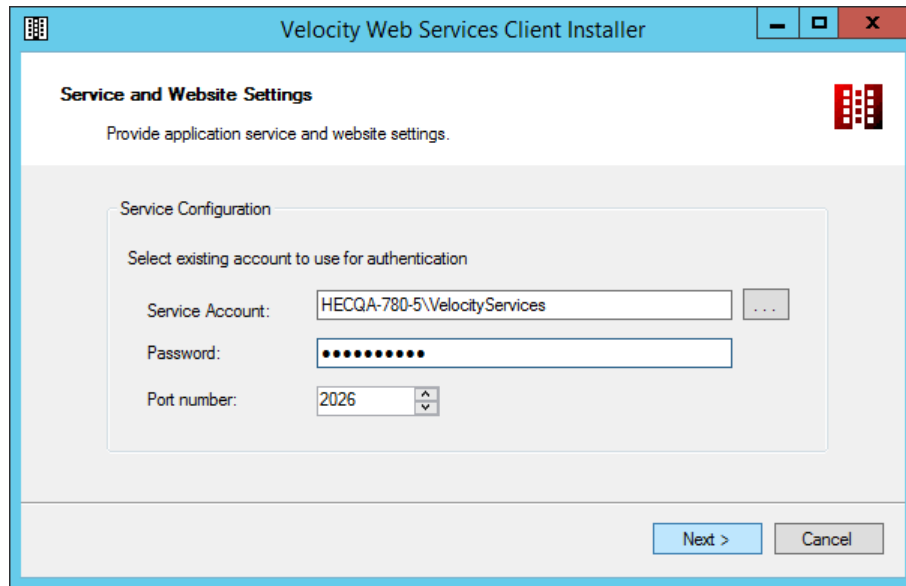


The screenshot shows the 'Velocity Web Services Client Installer' window. The title bar is blue with standard Windows window controls. The main window has a light blue header with the text 'Service and Website Settings' and a small red icon. Below the header, it says 'Provide application service and website settings.' The main content area is white and contains a 'Service Configuration' section. This section has a label 'Select existing account to use for authentication' and three input fields: 'Service Account:' with the text 'HECQA-780-5\VelocityServices' and a browse button '...'; 'Password:' with a masked password '.....'; and 'Port number:' with a dropdown menu showing '2026'. At the bottom right of the window are two buttons: 'Next >' and 'Cancel'.

3. On this **Service and Website Settings** screen:
 - A. In the **Service Account** field, verify or change the user account (by default in the Velocity Services group) that the underlying service for the Velocity Web Services Client will use to log on to Velocity.
 - B. In the **Password** field, enter the password that the specified Service Account will use to log on to Velocity. . (Enter the same password that was used on the **Application Network and Security** page when Velocity was installed.)
 - C. In the **Port number** field, enter the network port number that will be used for communication between Velocity and the Velocity Web Services Client.
 - D. Click **Next**.

An **Application Installation** screen displays progress information while the Velocity Web Services Client is being installed. For example:

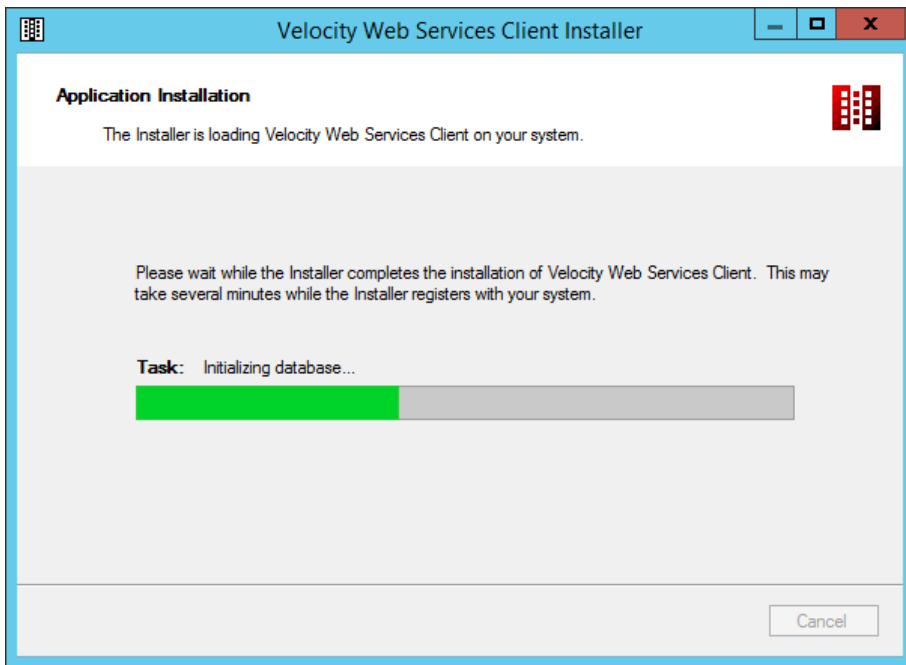

4. When the following dialog appears, choose whether or not you need the Velocity Web Service use the secured HTTPS protocol when communicating with some other software components.

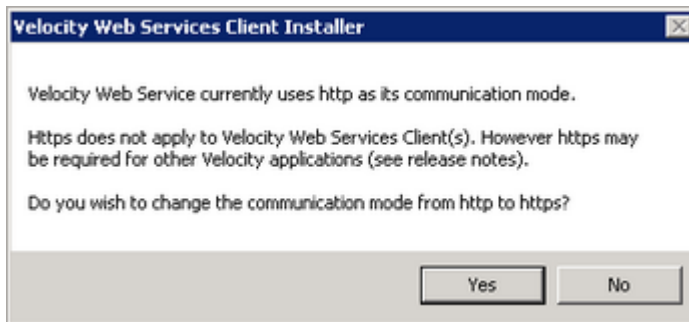

After the Velocity Web Services Client has finished installing, ensure that:

- [the Velocity Web Service is running](#)
- if you want to use a network port other than the default of 80, you must [configure the network port used by the default IIS Web site](#) to communicate with the Velocity Web Services Client
- [the network port used by the default IIS Web site is allowed through your firewalls](#)


Ensuring that the Velocity Web Service is Running



Role Permissions: To check the status of the Velocity Web Service, you must have the following Role Permission: **Application Permissions ► Service Control Manager ► Service Control Manager - Use**.

After you install the Velocity Web Services Client, you should use Velocity's Service Control Manager to verify that the Velocity Web Service is running.

Right-click on the Velocity Service Control Manager icon in the Windows taskbar, and look at the commands on the pop-up menu:

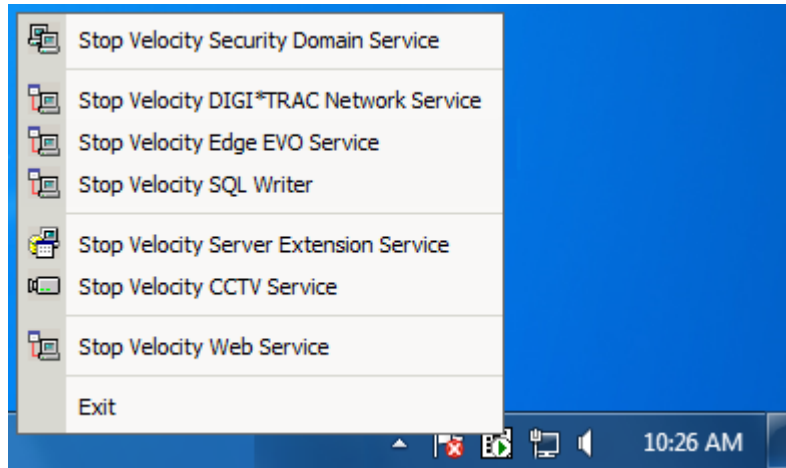

- If you see a command to **Start Velocity Web Service**, click on it.
- If you see a command to **Stop Velocity Web Service**, the service is already running, and you should click outside the pop-up menu to close it.

Configuring the network port used by the default IIS Web site


The Velocity Web Services Client works like a typical Web page, and connects to Microsoft's IIS using the HTTP protocol. The default network port is 80, which might already be used by some other program.

If you want to use a network port other than the default of 80, you can perform the following steps to configure the network port used by the default IIS Web site to communicate with the Velocity Web Services Client.

1. From your Windows Server Start menu (on the computer where IIS and the Velocity Server are installed), select **Administrative Tools ► Internet Information Services (IIS) Manager**.
2. In the Connections pane of the **Internet Information Services (IIS) Manager** window, expand the computer name, expand **Sites**, and then click on **Default Web Site**.
3. In the Actions pane (under Edit Site), click on **Bindings**.
4. In the resulting Site Bindings dialog, click the **http** entry, and then click on **Edit**.
5. In the resulting Edit Site Bindings dialog, enter the desired value (such as 8080) for the **Port**, and click **OK**.
6. Close the Site Bindings dialog.
7. In the Actions pane of the **Internet Information Services (IIS) Manager** window (under Manage Web Site), click **Stop**, and then click **Start**.


Ensuring that the Network Port used by the Default IIS Web Site is Allowed Through Your Firewalls

Because the Velocity Web Services Client communicates across a shared network (instead of a dedicated physical security network), you will have to work with your network administrator to ensure that the network port used by the default IIS Web site is allowed through your firewalls. Some networks use the software firewall provided with Microsoft Windows, other networks use a software firewall provided by a different vendor (as shown in the following image), and high-security networks include hardware firewalls.

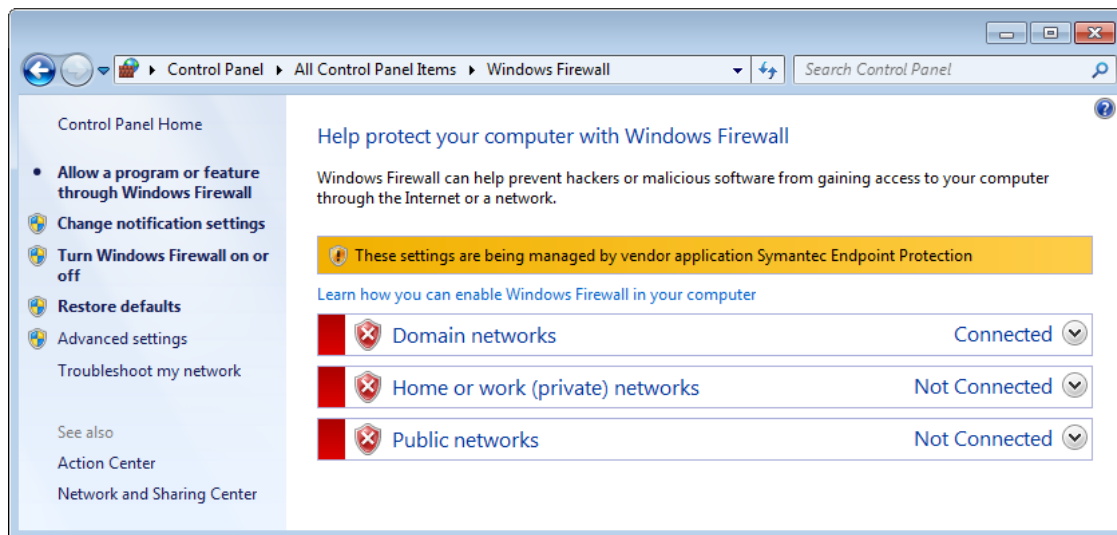


Because the firewalls on a network can vary so much, we cannot provide a detailed procedure for your specific network. But the following example for the Windows 7 Firewall should help illustrate the general process.

1. Open the Windows 7 **Control Panel**, and click on the **Windows Firewall** link.

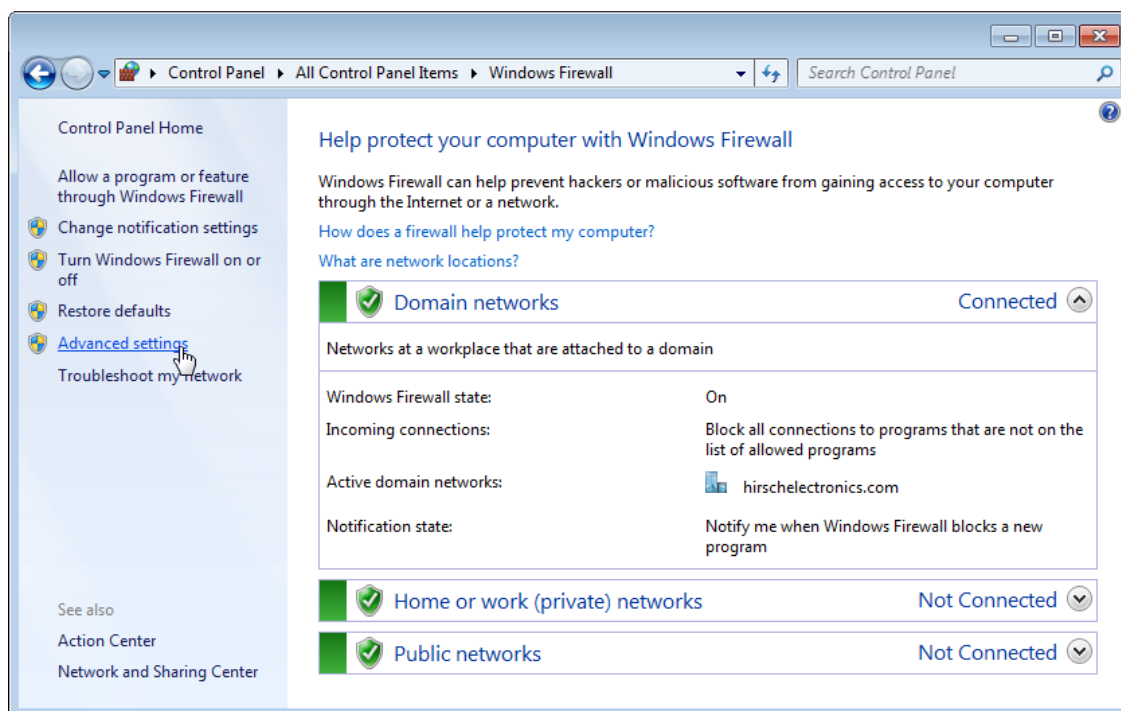


2. Click on the **Advanced settings** link (in the left column).

3. In the resulting **Windows Firewall with Advanced Security** window, click on **Inbound Rules** (in the left pane), and then click on **New Rule...** in the Actions pane.

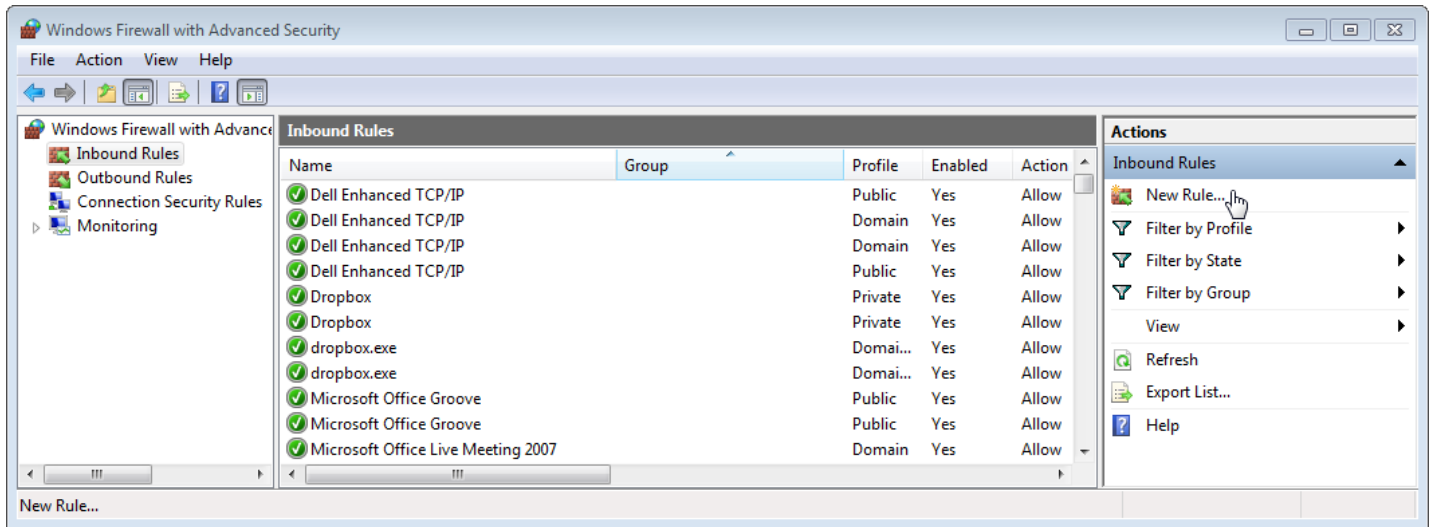

4. On the **Rule Type** page of the resulting **New Inbound Rule Wizard**, select the **Port** option, and then click **Next**.

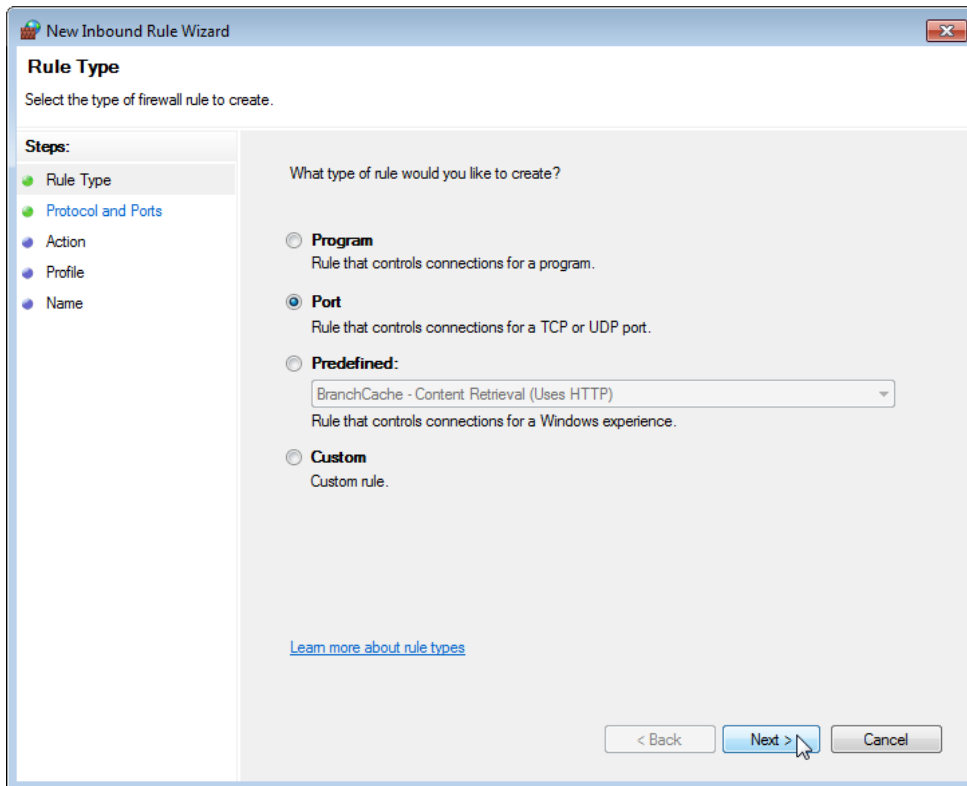


5. On the **Protocol and Ports** page, select the **TCP** option, select the **Specific local ports** option and enter the desired value (such as 8080), and then click **Next**.

The screenshot shows the 'New Inbound Rule Wizard' window, specifically the 'Protocol and Ports' step. The left sidebar lists the steps: Rule Type, Protocol and Ports (selected), Action, Profile, and Name. The main area contains two questions. The first question is 'Does this rule apply to TCP or UDP?' with radio buttons for TCP (selected) and UDP. The second question is 'Does this rule apply to all local ports or specific local ports?' with radio buttons for All local ports and Specific local ports (selected). Below the 'Specific local ports' radio button is a text input field containing '8080' and an example text 'Example: 80, 443, 5000-5010'. At the bottom right, there are three buttons: '< Back', 'Next >' (with a mouse cursor pointing to it), and 'Cancel'. A link 'Learn more about protocol and ports' is located at the bottom left of the main area.

6. On the **Action** page, click **Next** to accept the defaults.


The screenshot shows the 'New Inbound Rule Wizard' window, specifically the 'Action' step. The left sidebar lists the steps: Rule Type, Protocol and Ports, Action (selected), Profile, and Name. The main area contains a question 'What action should be taken when a connection matches the specified conditions?' with three radio button options: 'Allow the connection' (selected), 'Allow the connection if it is secure', and 'Block the connection'. Below the 'Allow the connection if it is secure' option is a 'Customize...' button. At the bottom right, there are three buttons: '< Back', 'Next >' (with a mouse cursor pointing to it), and 'Cancel'. A link 'Learn more about actions' is located at the bottom left of the main area.

- On the **Profile** page, click **Next** to accept the defaults.

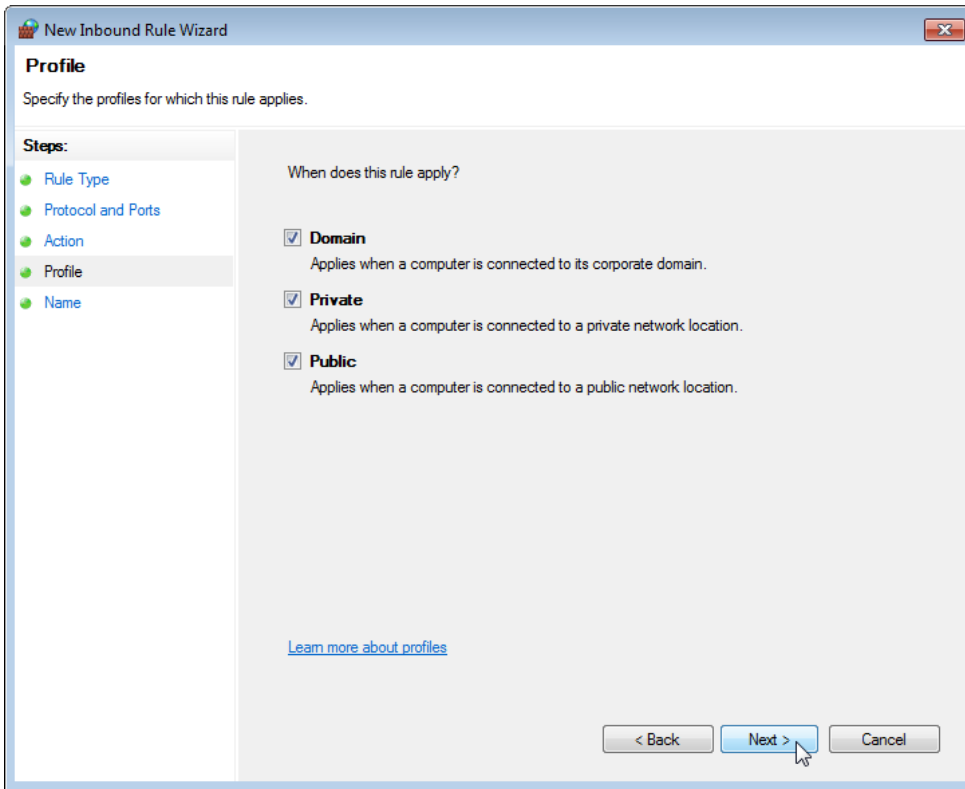

The screenshot shows the 'New Inbound Rule Wizard' window at the 'Profile' step. The title bar reads 'New Inbound Rule Wizard'. The main heading is 'Profile', followed by the instruction 'Specify the profiles for which this rule applies.' On the left, a 'Steps:' list includes 'Rule Type', 'Protocol and Ports', 'Action', 'Profile' (which is highlighted), and 'Name'. The main area is titled 'When does this rule apply?' and contains three checked options: 'Domain' (Applies when a computer is connected to its corporate domain.), 'Private' (Applies when a computer is connected to a private network location.), and 'Public' (Applies when a computer is connected to a public network location.). A link 'Learn more about profiles' is at the bottom left. At the bottom right are buttons for '< Back', 'Next >', and 'Cancel'. A mouse cursor is pointing at the 'Next >' button.

- On the **Name** page, enter the required **Name**, optionally enter a **Description**, and click **Finish**.

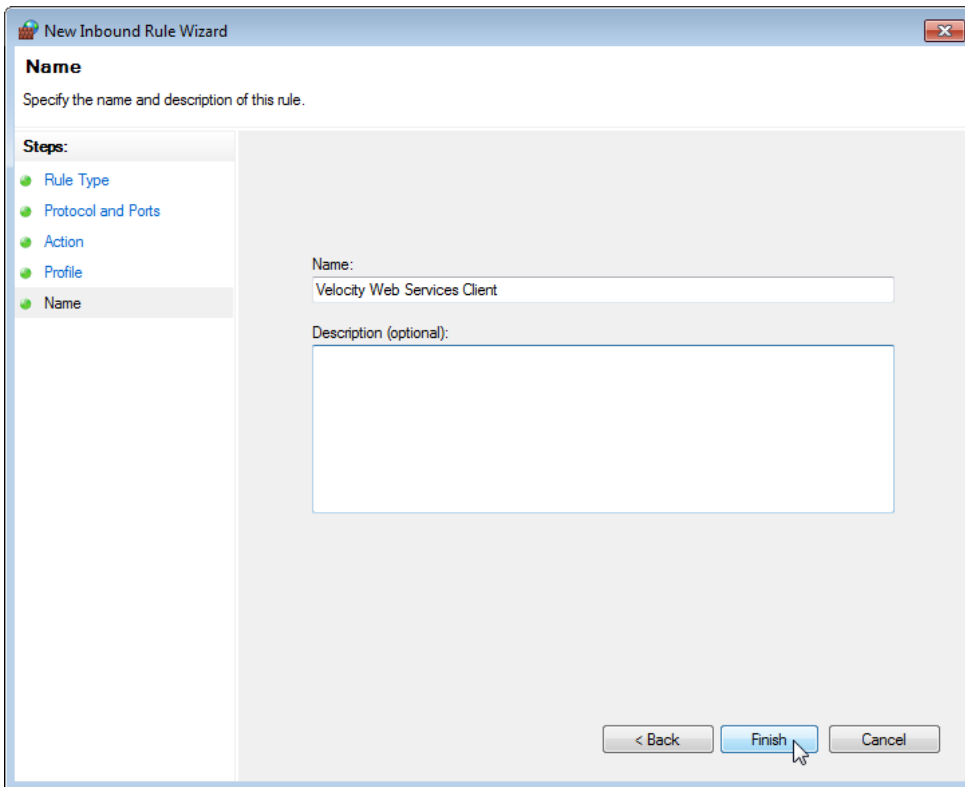


The screenshot shows the 'New Inbound Rule Wizard' window at the 'Name' step. The title bar reads 'New Inbound Rule Wizard'. The main heading is 'Name', followed by the instruction 'Specify the name and description of this rule.' On the left, the 'Steps:' list includes 'Rule Type', 'Protocol and Ports', 'Action', 'Profile', and 'Name' (which is highlighted). The main area has a 'Name:' label above a text box containing 'Velocity Web Services Client'. Below that is a 'Description (optional):' label above a larger text box. At the bottom right are buttons for '< Back', 'Finish', and 'Cancel'. A mouse cursor is pointing at the 'Finish' button.

Quick Tour of the Velocity Web Services Client


This section provides a quick tour of the functionality available in the Velocity Web Services Client.

Logging In to the Velocity Web Services Client

The Login page is used to log in to this client. Enter the username and password of an existing Velocity operator, and click Login. If either the username or the password is incorrect, the following error message is displayed:

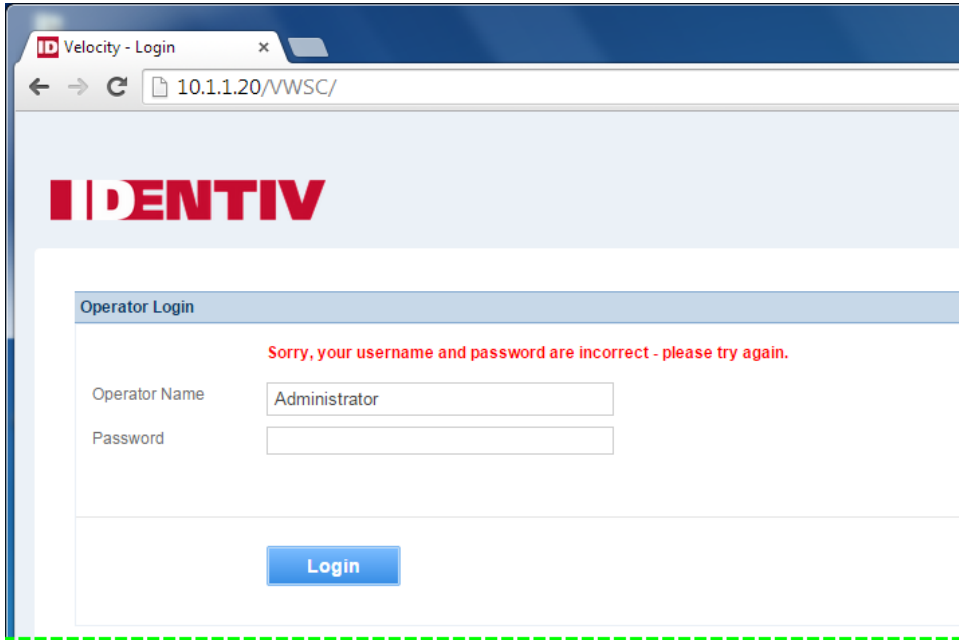


Commands on the Operator drop-down menu

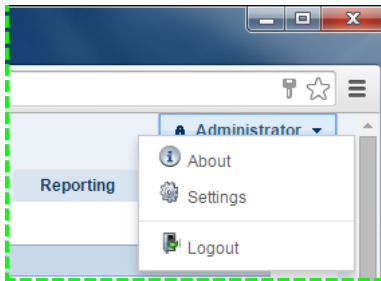

After you successfully log in to the Velocity Web Services Client, there is an Operator drop-down menu (in the upper right corner) that includes commands to:

- display an About dialog which shows version information for Velocity and the Velocity Web Services Client

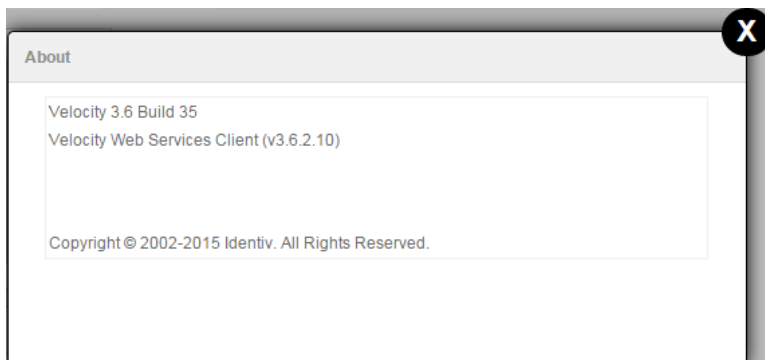

- open the Settings page where you can specify some options for the Velocity Web Services Client (including the “Landing Page” which is the default page displayed after you log in)

Velocity - Settings

10.1.1.20/VWSC/Configuration/ConfigurationManager

IDENTIV

Administrator

Enrollment Alarms Device Control Reporting Status Dashboard

Settings

General Alarms Events

Landing Page: Enrollment

Region : English - United States (Mid/yyyy h:mm:ss tt)

Apply Changes

Velocity - Settings

10.1.1.20/VWSC/Configuration/ConfigurationManager

IDENTIV

Settings

General **Alarms** Events

Maximum Page Size: Show 50 alarms per page (Max : 100)

Alarm Sorting: ☐ Display Alarms Most Recent to Oldest

Alarm Acknowledge Options:

- ☒ Require Acknowledge before Clearing
- ☐ Require Entry of Note on Acknowledge
 - ☐ Force New Note for Multiple Acknowledge
- ☐ Require Entry of Note on Clear
 - ☐ Force New Note for Multiple Clear

Velocity - Settings

10.1.1.20/VWSC/Configuration/ConfigurationManager

IDENTIV

Settings


General Alarms **Events**

Maximum Page Size: Show 50 events per page (Max : 100)

Show Events:


- ☒ On Enrollment Page
- ☒ On Device Control Page
- ☒ On Alarms Page
- ☒ Load Cached Events

- logout from your current session (and return to the Login page)

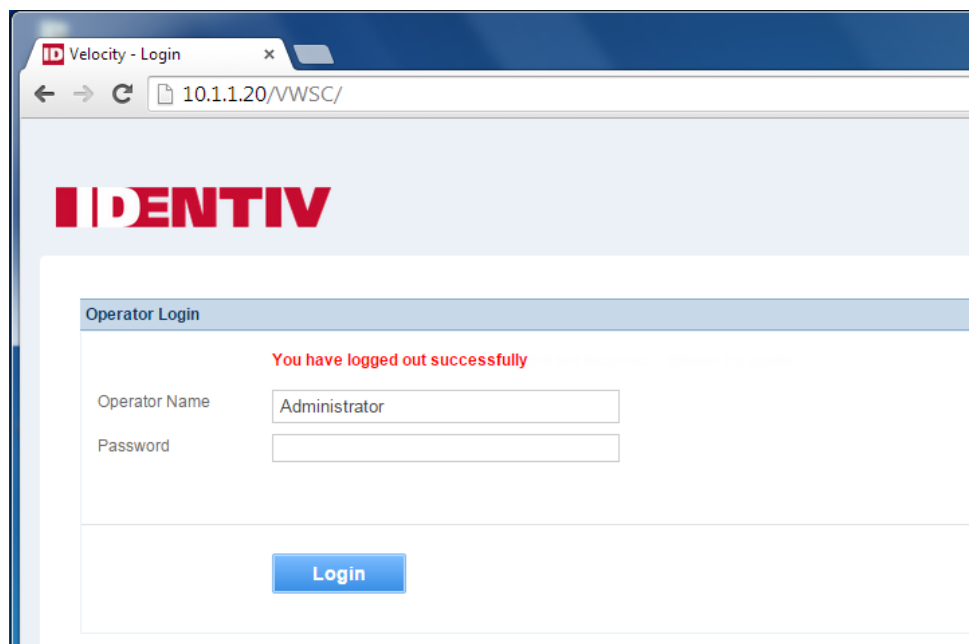

Enrollment page

The Enrollment page of the Velocity Web Services Client provides the most important functionality of Velocity's Enrollment Manager.

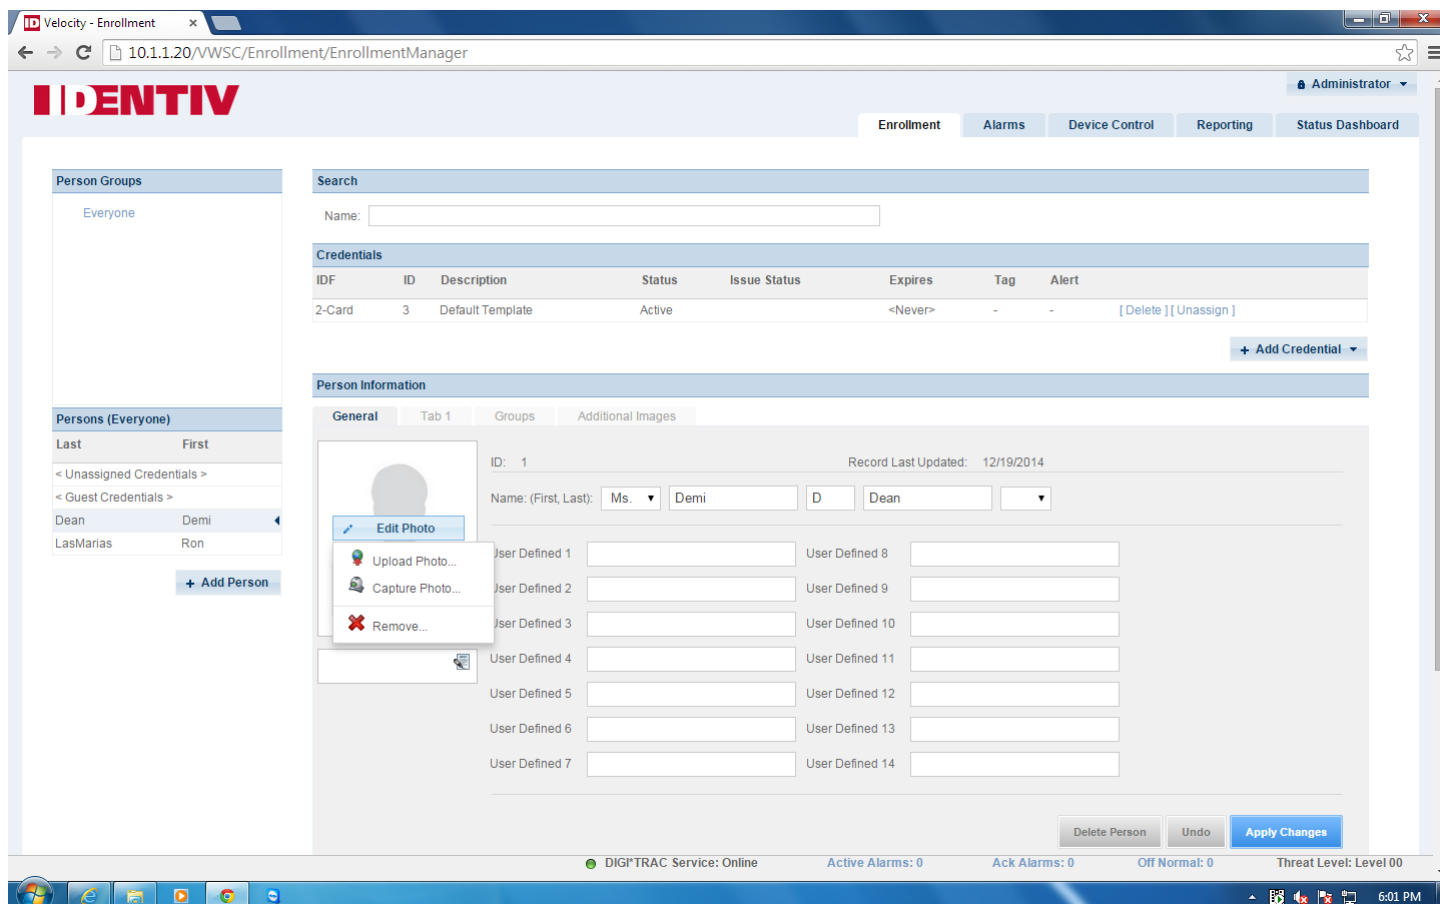

By default, this page also includes an Events pane which provides the most important functionality of Velocity's Event Viewer. (You can remove the Events page by unchecking the Show Events On Enrollment Page option on the Events tab of the Settings page.)

Alarms page

The Alarms page of the Velocity Web Services Client provides the most important functionality of Velocity's Alarm Viewer (including any pre-defined Instructions to the operator for a specific type of alarm and Notes entered by the operator to document their response to a specific alarm).

Velocity - Alarms

10.1.1.20/VWSC/Events/EventViewer

Administrator

Enrollment Alarms Device Control Reporting Status Dashboard

Alarms

There are no active alarms at this time

Acknowledged Alarms

Action	Host Time	Controller Time	Acknowledge Time	Description	Address	Acknowledged By
	12/19/2014 08:50:30 AM		12/19/2014 08:50:30 AM	uTrustVerge Service online	\\Verge.001	Velocity

Instructions

Notes

Date	Operator
12/23/2014 03:00:40 PM	Administrator

Verified that my card worked at the main lobby door.

Events

Host Time	Controller Time	Description	Address	Event Type	Event ID
12/23/2014 02:53:42 PM		Operator ADMINISTRATOR logged on to web client 10.1.1.5	\\HECQA-GX620-20.001	Software	1316
12/23/2014 02:43:55 PM	12/23/2014 02:43:47 PM	Relay Relay 02 state change (0) none	\\XNET.001.0002.001.01.BR02	DIGITRAC Internal	9033
12/23/2014 02:43:49 PM	12/23/2014 02:43:41 PM	Access granted: Ron LasMarias Door 02-Reader 02	\\XNET.001.0002.001.01.SM02	DIGITRAC Transaction	2000
12/23/2014 02:43:49 PM	12/23/2014 02:43:41 PM	Relay Relay 02 state change (1) door trigger	\\XNET.001.0002.001.01.BR02	DIGITRAC Internal	9033
12/23/2014 02:20:02 PM		Operator Administrator logged on to workstation HECQA-GX620-20	\\HECQA-GX620-20.001	Software	1022
12/23/2014 02:05:58 PM		Operator ADMINISTRATOR disconnected from workstation HECQA-GX620-20	\\HECQA-GX620-20.001	Software	1031
12/23/2014 12:00:06 PM	12/23/2014 12:00:00 PM	Warning! System code is 123 at controller (Mx4) Controller IP #246 - MSTR	\\XNET.001.0002.001.01	Miscellaneous	8015
12/23/2014 12:00:05 PM	12/23/2014 12:00:00 PM	Warning! System code is 123 at controller (M8) Controller IP #192	\\XNET.001.0001.001.01	Miscellaneous	8015
12/23/2014 12:00:05 PM	12/23/2014 12:00:00 PM	Warning! System code is 123 at controller (M2) Controller IP #485 - SLV	\\XNET.001.0002.001.02	Miscellaneous	8015

DIGITRAC Service: Online Active Alarms: 0 Ack Alarms: 0 Off Normal: 0 Threat Level: Level 00

5:57 PM

By default, this page also includes an Events pane which provides the most important functionality of Velocity's Event Viewer. (You can remove the Events page by unchecking the Show Events On Enrollment Page option on the Events tab of the Settings page.)

Device Control page

The Device Control page of the Velocity Web Services Client provides the most important functionality of Velocity's Administration window.

The screenshot displays the Velocity Device Control page. The top navigation bar includes the IDENTIV logo and tabs for Enrollment, Alarms, Device Control (selected), Reporting, and Status Dashboard. The left sidebar shows a tree view of the DIGITRAC Configuration, with folders for Doors, Expansion Inputs, Expansion Relays, Inputs, Readers, and Relays. The main content area features a table with columns for Action, Name, Index, and Address. The table lists 12 doors, each with an 'Access' dropdown and a 'Control' dropdown. Below the table is an 'Events' section with a table showing a log of events, including login and logout events for the Administrator. The bottom status bar indicates the DIGITRAC Service is Online, with 0 Active Alarms, 0 Ack Alarms, 0 Off Normal, and a Threat Level of Level 00.

Action	Name	Index	Address
Access ▾ Control ▾	Door 01	1	\XNET.001.0001.001.01.DR01
Access ▾ Control ▾	Door 01	1	\XNET.001.0002.001.01.DR01
Access ▾ Control ▾	Door 01	1	\XNET.001.0002.001.02.DR01
Access ▾ Control ▾	Door 02	2	\XNET.001.0002.001.02.DR02
Access ▾ Control ▾	Door 02	2	\XNET.001.0002.001.01.DR02
Access ▾ Control ▾	Door 02	2	\XNET.001.0001.001.01.DR02
Access ▾ Control ▾	Door 03	3	\XNET.001.0001.001.01.DR03
Access ▾ Control ▾	Door 03	3	\XNET.001.0002.001.01.DR03
Access ▾ Control ▾	Door 03	3	\XNET.001.0002.001.02.DR03
Access ▾ Control ▾	Door 04	4	\XNET.001.0002.001.02.DR04
Access ▾ Control ▾	Door 04	4	\XNET.001.0002.001.01.DR04
Access ▾ Control ▾	Door 04	4	\XNET.001.0001.001.01.DR04
Access ▾ Control ▾	Door 05	5	\XNET.001.0001.001.01.DR05
Access ▾ Control ▾	Door 06	6	\XNET.001.0001.001.01.DR06


Host Time	Controller Time	Description	Address	Event Type	Event ID
12/22/2014 02:02:48 PM		Operator ADMINISTRATOR logged on to web client 10.1.1.5	\HECQA-GX620-20.001	Software	1316
12/22/2014 01:42:07 PM		Operator ADMINISTRATOR logged off from web client 10.1.1.5	\HECQA-GX620-20.001	Software	1317
12/22/2014 01:40:44 PM		Operator ADMINISTRATOR logged on to web client 10.1.1.5	\HECQA-GX620-20.001	Software	1316

javascript:void(0) DIGITRAC Service: Online Active Alarms: 0 Ack Alarms: 0 Off Normal: 0 Threat Level: Level 00


By default, this page also includes an Events pane which provides the most important functionality of Velocity's Event Viewer. (You can remove the Events page by unchecking the Show Events On Enrollment Page option on the Events tab of the Settings page.)

Reporting page

The Reporting page of the Velocity Web Services Client provides the most important functionality of Velocity's Report Manager.

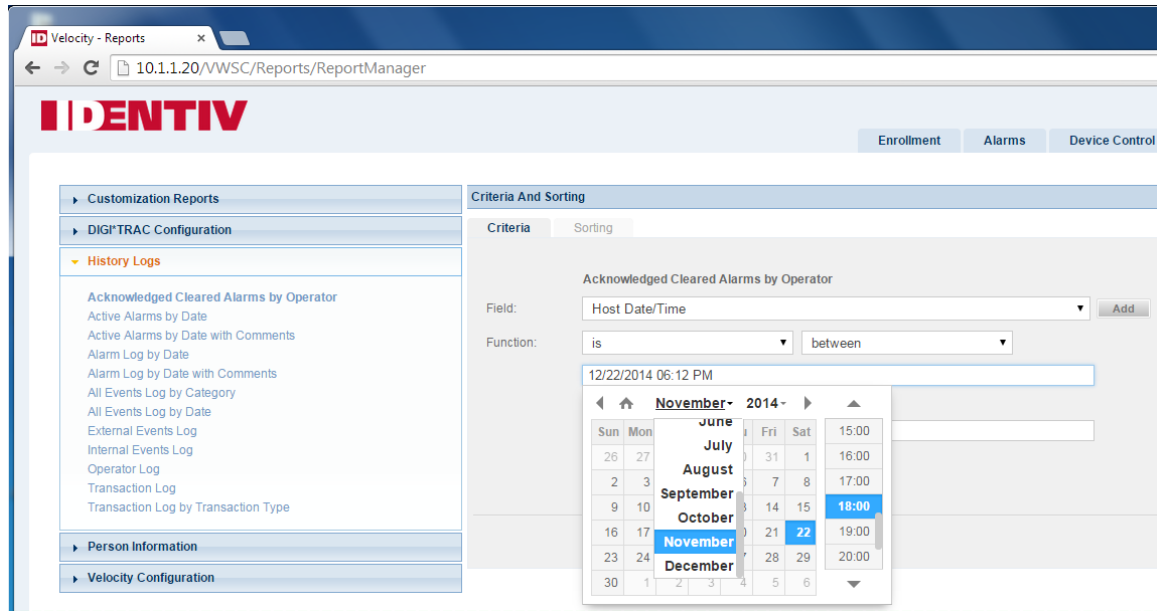


After you click **Generate Report**, a progress indicator is displayed until the request has completed. If the report fails for some reason, an error message is displayed. If the report succeeds, a Report Generated dialog with an **Open Report** button is displayed. When you click that button, the resulting .PDF file is opened in a new tab of the current browser window.

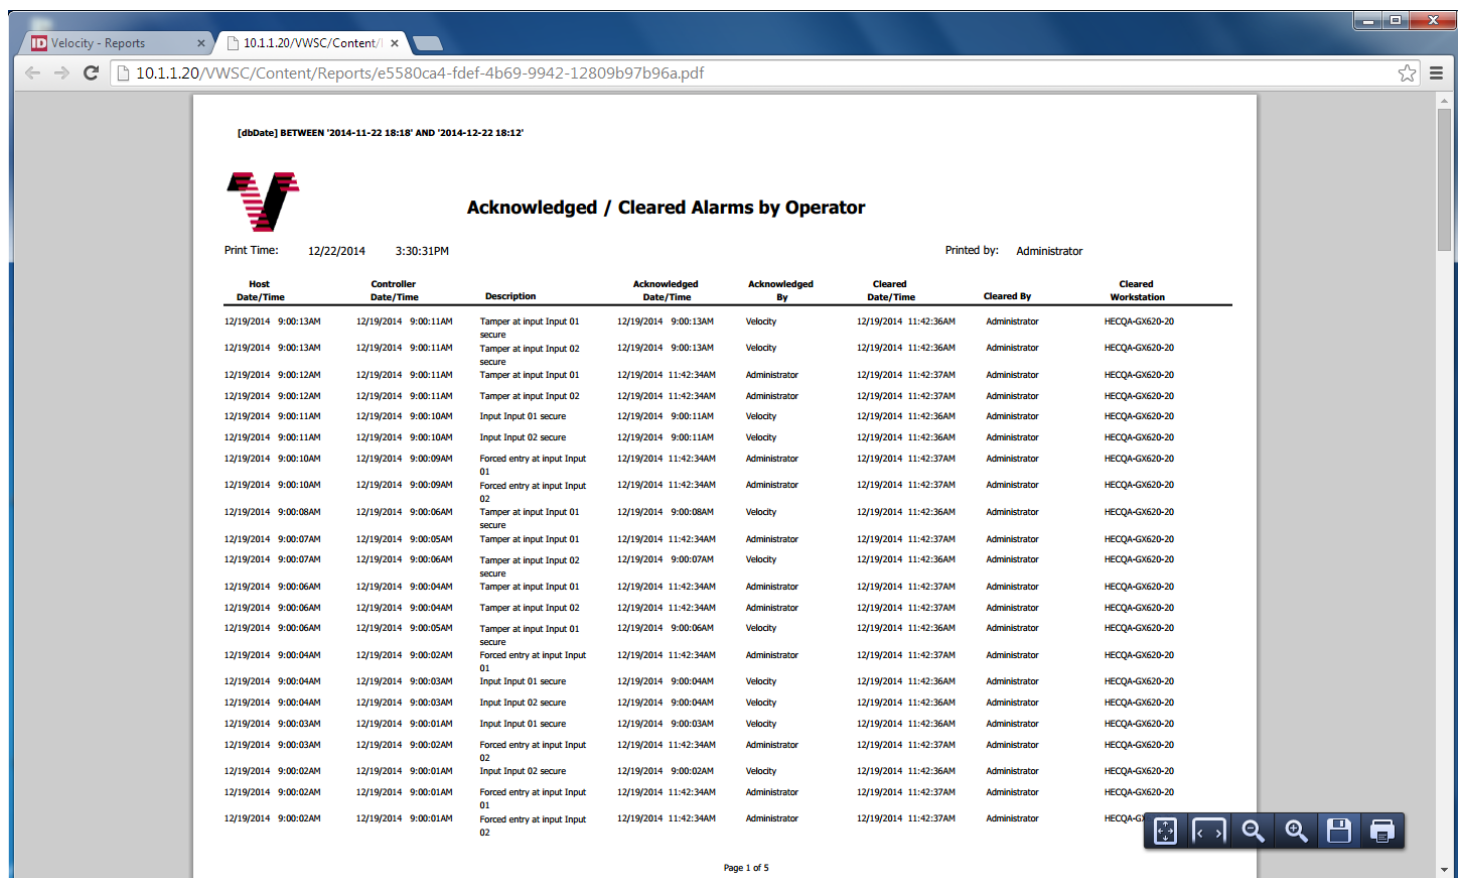

Status Dashboard page


The Status Dashboard page of the Velocity Web Services Client displays information about:

- the summary status of your People and Credentials
- the access that was granted or denied today
- the Live Events
- the Queued Downloads to your controllers

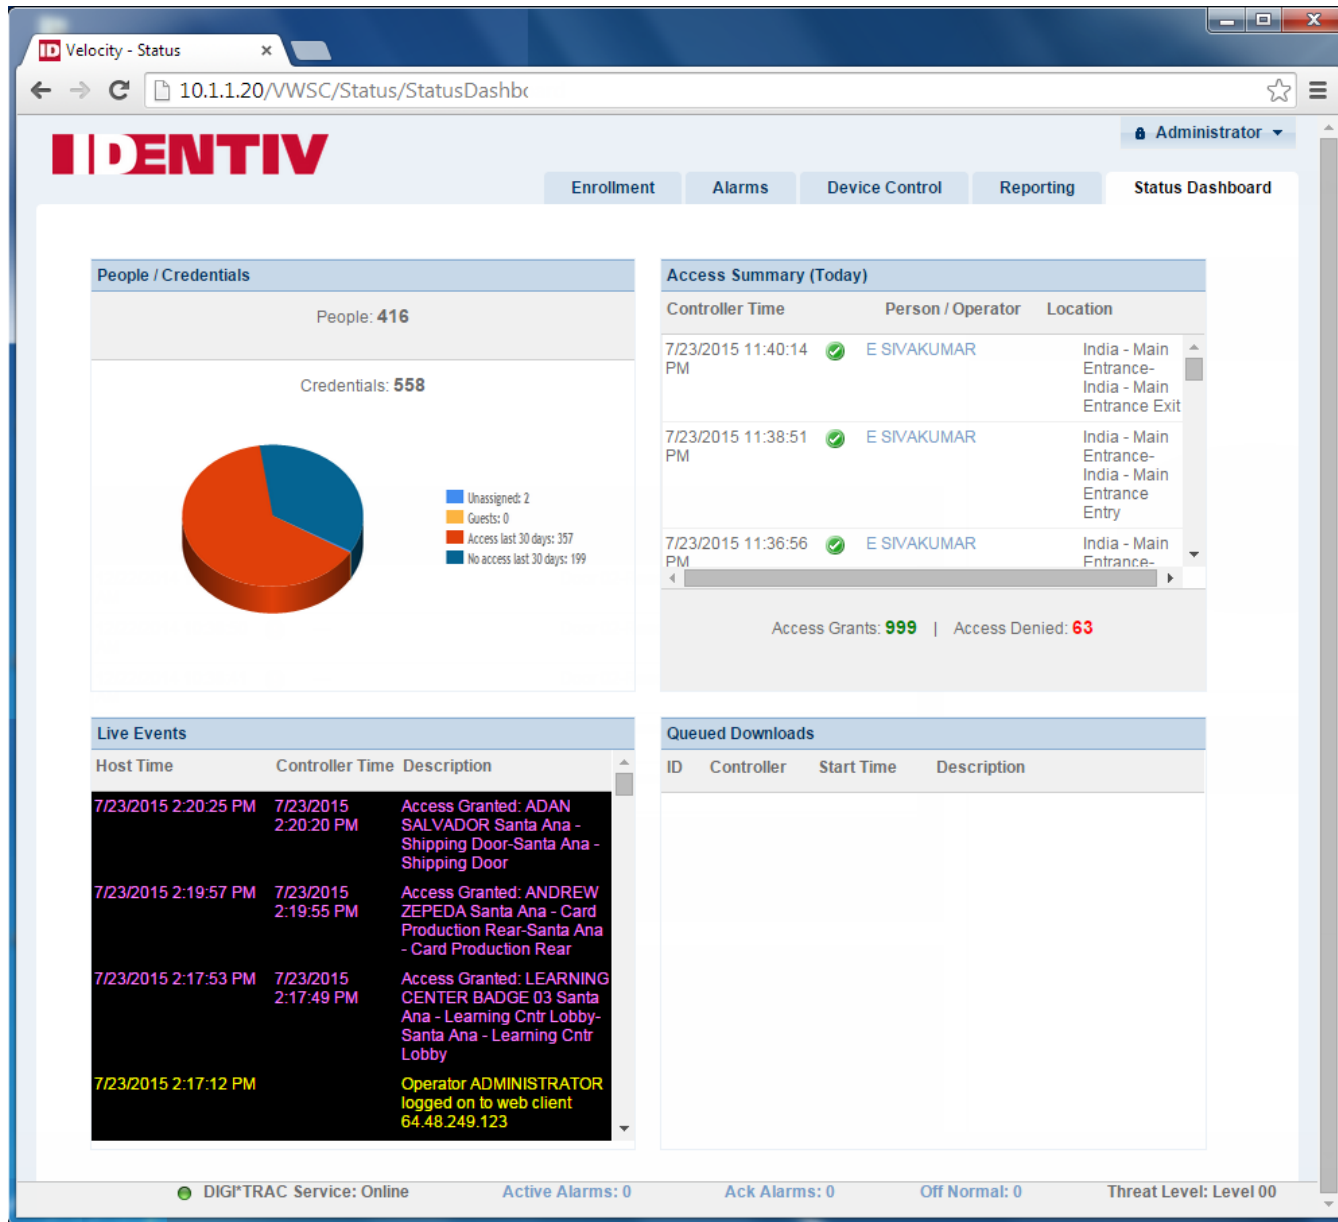

Status Bar


The status bar of the Velocity Web Services Client shows some status information about your Velocity system, including alarms and the threat level.



The items shown in blue are hyperlinks. If you click on the **Active Alarms** link or the **Ack Alarms** link, the Alarms page is displayed. If you click on the **Off Normal** link, the Off Normal Points dialog is displayed.

Pull-Out Menus for Narrow Browser Windows

When your Web browser window is too narrow to display all the information on certain pages of the Velocity Web Services Client, the smaller pane is moved to a pull-out menu on either the left or the right side. For example, on the Alarms page, the Instructions and Notes can move to a pull-out menu on the right side. On the Enrollment page, the Person Groups and the Persons list can move to a pull-out menu on the left side:

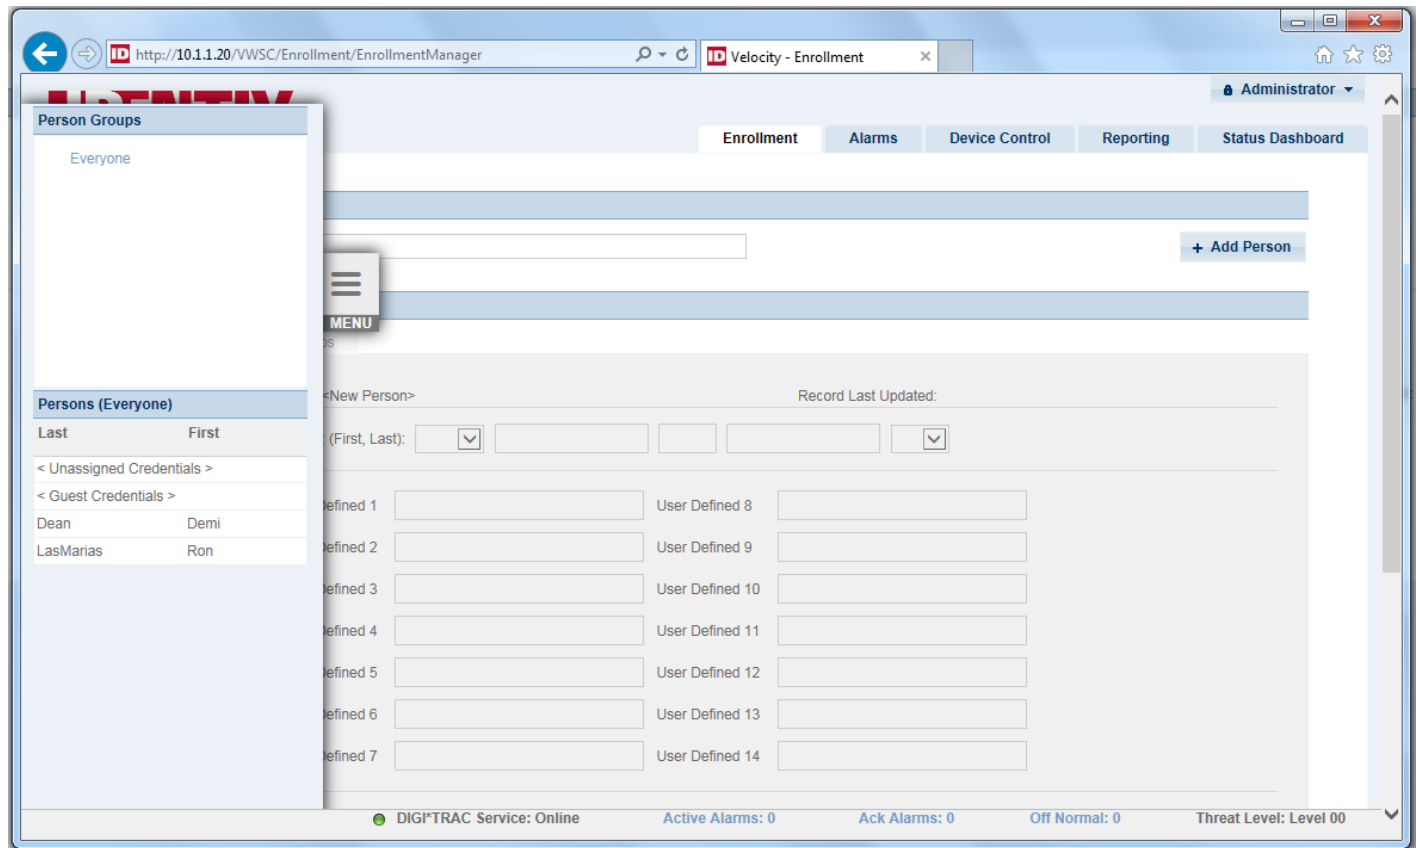


New Features and Enhancements

Reference ID	Feature	Description
VELWC-242	Support multiple access zones for a credential's Access function in the VWSC	<p>The General tab of the Velocity Preferences dialog (in Velocity's traditional Windows client) now includes the Enable Multi Access Zones option.</p> <ul style="list-style-type: none"> When this option is not activated (which is the default setting), Velocity continues to enforce the limitation that a credential can perform only one access function or control function per controller which applies to only one door group. When this option is activated, a credential is still limited to performing only one control function per controller which applies to only one door group. But a credential will be able to perform a specific access function on up to 9 door groups per controller. <p>NOTE: This feature requires CCM firmware version 7.5.28 (or later) to be installed on each controller where you want to enable multiple access zones. For any controller with an earlier version of the CCM firmware, only the first access zone (shown on the Function ► DIGI*TRAC tab of the Credential Properties dialog) will be enabled for that credential.</p> <p>CAUTION: Activating this feature may reduce the credentials capacity of your controllers by up to 50%.</p>

Bug Fixes

Reference ID	Bug	Description
VELWC-187	The previously selected credential template might be shown for the next new credential	<p>If a credential template has the “Link new credentials to this template” option enabled, then that credential template is automatically selected in the “Link to:” field of each new credential that you create. Otherwise, you must manually select an existing credential template if you wish to use one when creating a new credential.</p> <p>In the Velocity Web Services Client, the previously selected credential template was being shown in the “Link to:” drop-down list when you created the next new credential or viewed its properties. However, the checkbox in front of this option was cleared, so the displayed credential template was not actually applied to the new credential.</p> <p>This issue has been fixed.</p>
VELWC-191	Cannot generate a report when the Criteria includes the “ is not ” operator	<p>On the Reporting tab of the Velocity Web Services Client, an error dialog was displayed after you clicked Generate Report, if the “is not” operator was selected in the first drop-down list of the Criteria’s Function group of fields.</p> <p>This issue has been fixed.</p>
VELWC-207	Issue Control properties are disabled for an IDF 0 (Badge Only) credential	<p>In the Velocity Web Services Client, the Issue Control group of properties (on the Options tab of the Credential Properties dialog) are disabled for an IDF 0 (Badge Only) credential.</p> <p>This issue has been fixed.</p>
VELWC-227	When adding a new credential to a person, the Reissue... button was not disabled.	<p>When adding a new credential to a person, the Reissue... button (in the Issue Control section on the Options tab of the Credential Properties dialog) was not disabled if the Enable Issue Control option was selected.</p> <p>This issue has been fixed.</p>
VELWC-229	When reissuing a credential, the required Reason field could be left blank.	<p>When reissuing a credential, an operator who did not select a value for the Reason drop-down list was not informed that it was a required field.</p> <p>This issue has been fixed, by displaying the message “A reason for re-issuing credential must be specified.”</p>
VELWC-230	Cannot view the optional Comment entered when a credential was reissued.	<p>When reissuing a credential, an operator can optionally enter additional information in the Comment field. This information should be viewable later, by double-clicking on a reissue’s row in the table within the Issue Control section on the Options tab of the Credential Properties dialog, but this feature was not working.</p> <p>This issue has been fixed.</p>
VELWC-232	A download event with an ID value of 0 was shown in the Queued Downloads table of the VWSC after an operator tried to download a set of credentials without any assigned door groups	<p>When an operator created a set of credentials without any assigned door groups and then tried to manually download credentials to a controller, Velocity correctly ignored the request and nothing was displayed in the Download Monitor of the traditional Windows-based Velocity Client. However, a download event with an ID value of 0 was shown in the Queued Downloads table on the Status Dashboard page of the Velocity Web Services Client.</p> <p>This issue has been fixed.</p>
VELWC-234	Operator instructions for video-related alarms were not displayed.	<p>If an optional instruction to an operator had been created for a video-related event (using the Customization Manager), it was not being displayed in the Instructions pane on the Alarms page of the Velocity Web Services Client.</p> <p>This issue has been fixed.</p>

Reference ID	Bug	Description
VELWC-237	The Reissue... button was not disabled when the Count reached the Max.	<p>The Reissue... button in the Issue Control section on the Options tab of the Credential Properties dialog should not be enabled after the current Count value reaches the Max value.</p> <p>This issue has been fixed.</p>
VELWC-238	The Current Issue Status drop-down list was not enabled for a credential with IDF=0.	<p>For a credential with ID Format 0 (Badge only), the Current Issue Status drop-down list (on the Options tab of the Credential Properties dialog) was not enabled.</p> <p>This issue has been fixed.</p>
VELWC-239	VWSC not generating a MATCH code derived from UDFs.	<p>When creating a new credential where the MATCH code is derived from one or more User-Defined Fields, the Velocity Web Services Client was not generating a MATCH code.</p> <p>This issue has been fixed.</p>
VELWC-243	Velocity Web Services Client was removing special characters entered in a card's Data field.	<p>There is a Data field (within the Card section on the General tab of the Credential Properties dialog) that enables you to manually enter a card's data. But the Velocity Web Services Client was removing special characters (such as a dash) that were entered, so the MATCH code it generated was different than the one generated by the traditional Windows client (which retained those characters).</p> <p>This issue has been fixed.</p>
VELWC-244	<i>Steve suggests:</i> If the VWSC was uninstalled, it was automatically reinstalled during a later Velocity update.	<p>If the Velocity Web Services Client was uninstalled, it was automatically reinstalled during a later Velocity update (instead of asking whether you wanted to Install or Skip the optional Velocity Web Services Client).</p> <p>This issue has been fixed.</p>
VELWC-245	Installation of VWSC failed when there was no default Web site for IIS.	<p>The installation of the Velocity Web Services Client would fail if there was no default Web site for IIS (or if the Web site did not have the instance number of 1).</p> <p>This issue has been fixed.</p>
VELWC-249	"Initial Issue" record not shown in the Credential Properties dialog.	<p>After a new credential was created, its "Initial Issue" record was not shown in the table within the Issue Control section on the Options tab of the Credential Properties dialog.</p> <p>This issue has been fixed.</p>
VELWC-251	VWSC's modules were not populated after logging in to <ComputerName>/VWSC/ using IE 11.	<p>The Velocity Web Services Client's modules were not populated after logging in to <ComputerName>/VWSC/ using Microsoft's Internet Explorer 11, because that browser was trying to display the Web page in Document mode (instead of Browser mode).</p> <p>This issue has been fixed.</p>
VELWC-252	Access Summary (Today) pane on VWSC's Status Dashboard was showing the wrong year.	<p>The Access Summary (Today) pane on the Status Dashboard page of the Velocity Web Services Client was showing the wrong year value (in the Controller Time column) for some events.</p> <p>This issue has been fixed, by updating a database script.</p>
VELWC-253	Script error could cause failure of the VWSC installation.	<p>An error in a database script could cause the installation of the Velocity Web Services Client to fail.</p> <p>This issue has been fixed.</p>

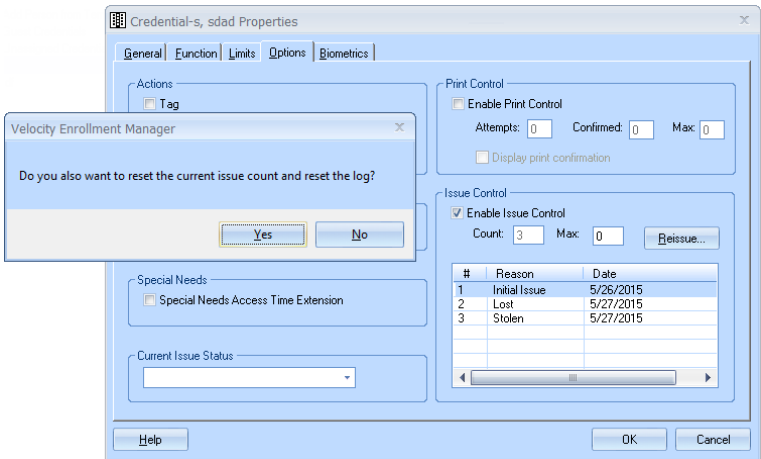Reference ID	Bug	Description
VELWC-254	Access Summary (Today) pane on VWSC's Status Dashboard was not showing all access events	<p>The Access Summary (Today) pane on the Status Dashboard page of the Velocity Web Services Client was not showing some types of access events, such as:</p> <ul style="list-style-type: none"> • Most access denied events at a DIGI*TRAC or Mx controller • Any access events at an Edge EVO controller (if that optional integration had been installed) <p>This issue has been fixed.</p>
VELWC-257	Setting the Max field to 0 for a reissued credential did not display a dialog about resetting the current issue count and the log.	<p>In Velocity's traditional Windows client, setting the Max field in the Issue Control section on the Options tab of the Credential Properties dialog to 0 when the card had been reissued displays a dialog asking "Do you also want to reset the current issue count and reset the log?":</p>  <p>This feature was not working in the Velocity Web Services Client.</p> <p>This issue has been fixed.</p>
VELWC-258	VWSC not generating unique values when a person's info has multiple Auto-unique UDFs.	<p>When a person's information contained multiple Auto-unique User-Defined Fields, the values generated by the Velocity Web Services Client were not unique for each field.</p> <p>This issue has been fixed.</p>
VELWC-260	Assign and Unassign links not working for an operator with the correct role permission	<p>The [Assign] and [Unassign] links on the Enrollment page of the Velocity Web Services Client were not working for an operator who had the correct Velocity role permission of "Application Permissions ► Enrollment Manager ► Credentials – Assign & Unassign".</p> <p>This issue has been fixed.</p>
VELWC-263	<i>Steve suggests:</i> Velocity Web Services was not deleted as part of the VWSC uninstall.	<p>Uninstalling the Velocity Web Services Client did not also delete Velocity Web Services from the Windows services.</p> <p>This issue has been fixed in the Velocity 3.6 release. However, see the related Known Issue VELWC-270.</p>

Known Issues with the Velocity Web Services Client

Reference ID	Summary	Description
VELWC-79	Status of an IDF 0 (Badge Only) credential is different in the VWSC versus the traditional Velocity Client	<p>When a credential is set to IDF 0 (Badge Only), there are some differences in the status displayed in the Velocity Web Services Client versus the traditional Windows-based Velocity Client.</p> <p>There is no workaround for this issue.</p>
VELWC-139	Report generated in the VWSC by a non-Admin operator has a "Printed by:" value of VELOCITYSERVICES	<p>When a non-Admin operator generates a report in the Velocity Web Services Client, the "Printed by:" value is VELOCITYSERVICES.</p> <p>The workaround is to generate the report in the traditional Windows-based Velocity Client, which does display the correct operator name.</p>
VELWC-174	Changes to an operator's role permissions do not take affect during the current session of the VWSC	<p>The Velocity Web Services Client caches the role permissions when an operator logs in. If an Administrator uses the traditional Windows-based Velocity Client to change a role permission for that operator, the change will not take effect in the Velocity Web Services Client until the operator logs off and then logs in again.</p> <p>There is no workaround for this issue.</p>
VELWC-179	The Persons list keeps trying to load when an operator without the role permissions to use any Person Groups selects the Enrollment tab in the VWSC	<p>If a non-Admin operator's only role does not include the role permissions to use any Person Groups, then the Persons list keeps trying to load when the operator selects the Enrollment tab in the Velocity Web Services Client. (In the traditional Windows-based Velocity Client, a warning message is displayed for this situation.)</p> <p>There is no workaround for this issue.</p>
VELWC-204	Version 11 of Internet Explorer (or a different browser) is required to create a person or a credential	<p>If you try to use version 8 (or earlier) of Microsoft's Internet Explorer with the Velocity Web Services Client, you cannot create a person or a credential. To use Internet Explorer, you must upgrade it to version 11 (or later).</p> <p>Alternatively, you can use a different browser such as Google's Chrome (version 39.0 or later).</p>
VELWC-231	The Date/Time format is not consistent across the VWSC	<p>In the Velocity Web Services Client, a Date/Time is not displayed in a consistent format. It is displayed differently in:</p> <ul style="list-style-type: none"> • a user-defined field (UDF) with the Type of Date • the activation and expiration fields of a credential • the date/time fields of a report's selection Criteria <p>There is no workaround for this issue.</p>
VELWC-236	Expire on UDF date option is not disabled if there are no UDFs with the type of Date.	<p>When you set the expiration date for a credential using the Velocity Web Services Client, the Expire on UDF date option (on the Set Expiration Date dialog) is not disabled if there are no User-Defined Fields with the type of Date.</p> <p>There is no workaround for this issue.</p>
VELWC-259	VWSC allows an operator without the necessary role permission to reissue an existing credential.	<p>An operator without the Velocity role permission of "Application Permissions ► Enrollment Manager ► Credentials – Issue Control" should not be able to use the Issue Control feature (on the Options tab of the Credential Properties dialog), but the Velocity Web Services Client allows an operator without that role permission to enable the feature and reissue an existing credential.</p> <p>There is no workaround for this issue.</p>

Reference ID	Summary	Description
VELWC-267	VWSC does not display multiple control zones (on the Functions tab of the Credential Properties dialog).	<p>When multiple control zones have been defined using the traditional Windows-based Velocity Client, only one of those control zones is shown on the Functions tab of the Credential Properties dialog in the Velocity Web Services Client.</p> <p>There is no workaround for this issue.</p>
VELWC-268	The Queued Downloads pane on the Status Dashboard page does not show info about credential downloads.	<p>Information about CD is displayed in the Download Monitor of the traditional Windows-based Velocity Client, but is not displayed in the Queued Downloads pane on the Status Dashboard page in the Velocity Web Services Client.</p> <p>There is no workaround for this issue.</p>
VELWC-270	Velocity Web Services not deleted as part of the VWSC uninstall on Velocity 3.5 SP2.1, which can cause problems if you later install Velocity 3.6.	<p>If you uninstall the Velocity Web Services Client from a Velocity 3.5 SP2.1 system (or completely uninstall Velocity), the Velocity Web Services service is not deleted. This can cause problems if you later install Velocity 3.6 on that computer.</p> <p>The workaround is that after uninstalling the Velocity Web Services Client on Velocity 3.5 SP2.1, you must:</p> <ol style="list-style-type: none"> 1. Log on to Windows with a user account that has local Administrator privilege. 2. Open a command prompt and run the following command: SC delete "VWSX" 3. Open the Windows Service Manager and check whether the Velocity Web Services service is still listed. If it is, reboot the computer.
VELWC-278	Problems when changing the card Type of a credential with a MATCH code derived from UDFs.	<p>If a credential has a MATCH code derived from one or more User-Defined Fields, changing its card Type (on the General page of the Credential Properties dialog) in the Velocity Web Services Client causes the following problems:</p> <ul style="list-style-type: none"> • all the UDFs that were previously selected get un-selected • the order of the UDFs is reset <p>There is no workaround for these issues.</p>