


# uTrust 4511 F

## 13.56 MHz Contactless Reader/Writer Module with SAM

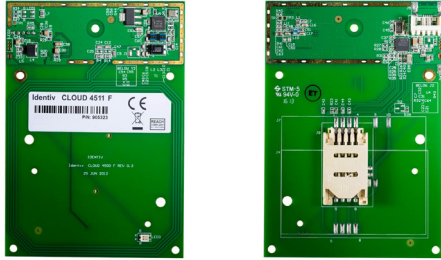

- **EASY TO INTEGRATE**  
Quick integration with full ISO/IEC 14443 support and ISO/IEC 7816 SAM
- **CONVERGENCE**  
Featuring secure contactless, and NFC technologies for use with mixed credential populations
- **INTEROPERABLE**  
Supports major card ICs, standards, and technologies
- **FAST**  
Transaction time optimized with support of 848kB/s in ISO/IEC 14443 and 600kB/s in ISO/IEC 7816 for SAM and maximum end-user acceptance

Identiv's 4511 F Contactless Smart Card Reader/Writer Module is the ideal combination of contactless and NFC technologies protected by an optional SAM in a single device. Easy integration enables a short time to market for OEMs, system integrators, and VARs, building innovative solutions such as closed loop paymentless security, network log-on, secure web-based transactions, or NFC-based identification schemes.

Supporting 13.56 MHz contactless technology, and NFC, this PC-linked reader module features end-user environments where virtually all types of credentials are used, even in mixed credential populations. With its all-in-one concept, uTrust 4511 F enables a smooth transition from well-established traditional technologies into emerging NFC applications, supporting new business opportunities. Featuring an onboard SAM-sized socket, uTrust 4511 F conveniently adds extra security to most contactless applications. uTrust 4511 F helps drive end-user solution acceptance with convenience, transaction time efficiency, security, flexibility, and complete NFC capabilities.

PARAMETER	UTRUST 4511 F
Host Interface	USB 2.0 CCID (USB 1.1/3.0 compliant)
Communication Speed	12 Mbps (USB 2.0 full speed)
<b>Contact Smart Card Interface</b>	
Supported Standards	ISO/IEC 7816 Part 1 to 4
Supported Tag ICs	All major ISO/IEC 7816 compliant smart card IC support
Protocols	T=0, T=1
Interface Speed	Up to 600 kB/s (depending on card); TA1=97
Clock Frequency	ISO/IEC 7816 compliant up to 5 MHz; operates up to 16 MHz
Supported Smart Card Types	5V, 3V, and 1.8V; ISO/IEC 7816 Class A/B/C
Power to Smart Card	60mA in Class A; 55mA in Class B; 35mA in Class C
Smart Card Detection	Card present switch, automatic power on/off, short circuit protection
Contact Card Size	ID-000 (Mini SIM card format 25 mm × 15 mm)
Contact Type	<ul style="list-style-type: none"> <li>• 8 pin ID000 socket</li> <li>• C4/C8 support</li> <li>• Socket lock function</li> <li>• SAM detect switch</li> </ul>
<b>Contactless Interface</b>	

PARAMETER	UTRUST 4511 F
Supported Standards	ISO/IEC 14443 A/B Part 1 - 4; ISO/IEC 18092; ECMA-340 (NFCIP-1)
Contact Smart Card Protocols	T=CL
Supported Card Chips	M IFARE Classic, MIFARE Ultralight, MIFARE Ultralight C, MIFARE Plus, MIFARE DESFire EV1/EV2/EV3, FeliCa™, Calypso, CD21, iClass with iClass SAM, NFC Forum Tag Types 1/2/3/4
Data Transfer Rate	106/212/424/848 kB/s (depending on card IC)
Operating Distance	Up to 70 mm (2.756 in), depending on card chip type and card antenna size
Antenna	Integrated
<b>Driver and Software</b>	
PC/SC Driver	PC/SC specification version 2.01.09 for: <ul style="list-style-type: none"> <li>Windows® XP/Vista/7/8 (32&amp;64Bit), Windows® Server 2003/2008/2012, Windows® CE 6.0, 7.0</li> <li>MacOS 10.5.x, 10.6.x, 10.7.x, 10.8.x</li> <li>Linux 2.4.x, 2.6.x (32 and 64 Bit)</li> </ul>
Software	PC/SC API; CT-API (through wrapper on top of PC/SC); Synchronous-API (through wrapper on top of PC/SC)
<b>Operating Conditions</b>	
Power Supply	USB Bus-powered
Power Consumption	<120 mA excluding smart SAM; <185 mA with smart SAM; <500 µA in standby mode
Dimensions	100 x 70 x 10 mm (3.937 x 2.756 x 0.394 in)
Weight	27 g (0.06 lb) ± 5%
Operating Temperature Range	0° to 50°C (32° to 122°F)
Storage Temperature Range	-20° to 60°C (-4° to 140°F)
Operating Humidity Range	Up to 95% RH non-condensing
Durability	Sliding contact 100,000 card insertions
MTBF	100,000 hours
Connector	5-pin molex connector
Status Indicator	LED
Firmware In-field Upgradeable	Yes
<b>Certifications/Compliance</b>	
Systems/Standards	ISO/IEC 7816, USB 2.0 full speed, CCID, Microsoft® WHQL
Regulatory/Environmental	CE, UL94, RoHS2, REACH, FCC ready
<b>Ordering Information</b>	
Product Part Number	905565-2

Identiv, Inc. (NASDAQ: INVE) is a global provider of physical security and secure identification. Identiv's products, software, systems, and services address the markets for physical and logical access control and a wide range of RFID-enabled applications. Customers in the government, enterprise, consumer, education, healthcare, and transportation sectors rely on Identiv's access and identification solutions. Identiv's mission is to secure the connected physical world: from perimeter to desktop access, and from the world of physical things to the Internet of Everything.

Identiv has offices worldwide. Addresses and phone numbers are listed at [identiv.com/contact](http://identiv.com/contact). For more information, visit [identiv.com](http://identiv.com) or email [sales@identiv.com](mailto:sales@identiv.com).

Technical data is subject to change without notice.

Copyright © 2021 Identiv, Inc. | All rights reserved. This document is Identiv public information.

Revision/Date of Release: 2021-01-29

[identiv.com](http://identiv.com)